
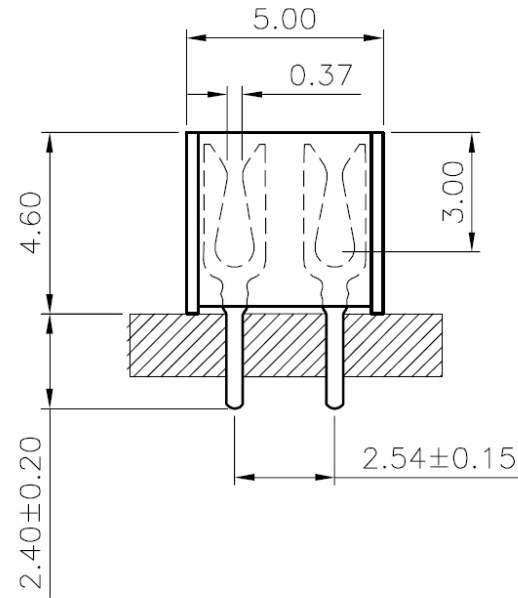
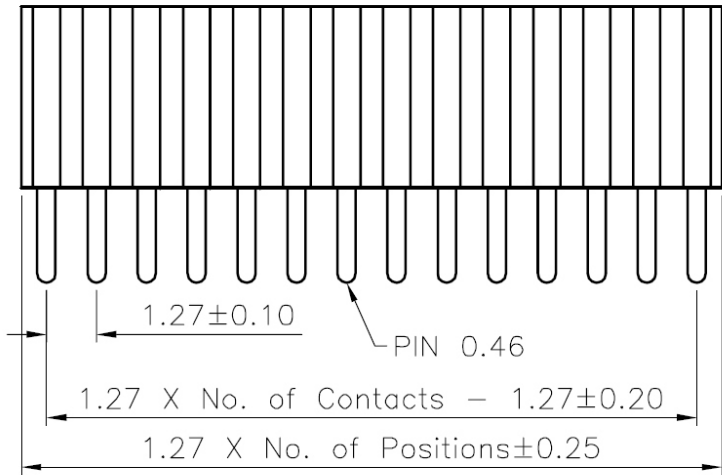


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

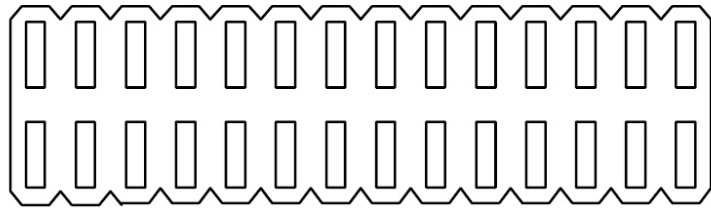

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon-6T
 Plating: Gold flash

Y-D46-2Xxx-LF

LEADFREE

RoHS Compliant

Recommended P.C.Board
 Hole Layout



PART NO. **Y-D46-2Xxx**

DWG NO. **Y-D46-2Xxx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司