


N=Number of contacts
P.C.B LAYOUT

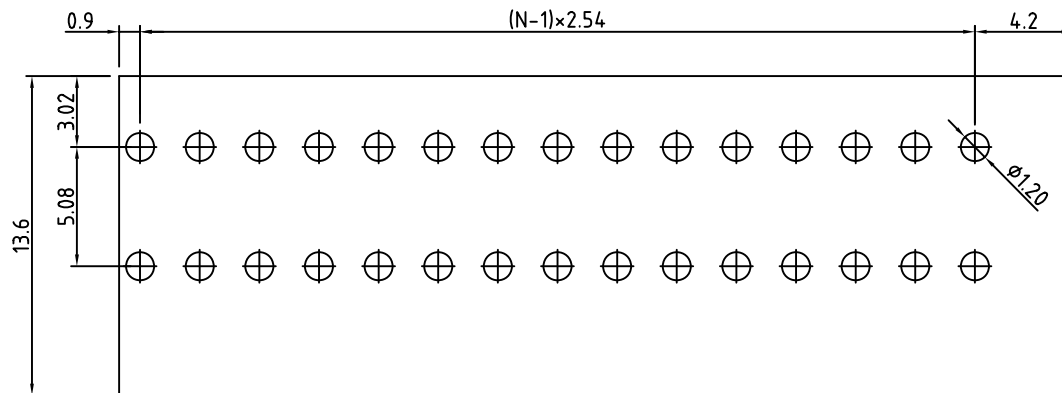

Technical Data:

Material:

- Contact : Brass
- Wire guard : stainless steel
- Surface of solder tail : Tin plated
- Insulator body(housing) : Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating : 150VAC
- Current rating : 2Amps/way max
- Contact resistance : 20mΩ(max)
- Insulation resistance : 1000MΩ min.
- Wire range : 20-26AWG

Mechanical:

- Operating temperature : -55°C to +105°C
- Test temperature= 250°C 5 seconds max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

TBX026-R12-xx-LF

SERIES	LEADFREE
02-24WAY	
HIGH 12.6mm	
DIP 90°	

DESCRIPTION: