


| | |
|---------------|------------------|
| MODEL NO. | COLOR OF HOUSING |
| RCA-JR50E1-03 | BLACK |

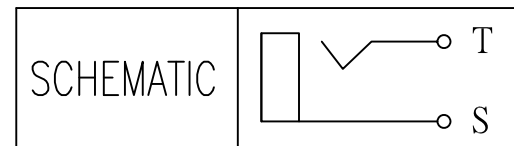

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

| | | | | |
|-----|---------------|-----|----------|--------------------|
| 5 | COVER | 1 | ABS | UL-94HB(BLACK) |
| 4 | TERMINAL | 1 | C2680R-H | MB:Cu Cu/Sn PLATED |
| 3 | TERMINAL | 1 | C2680R-H | MB:Cu Cu/Sn PLATED |
| 2 | OUTER CONTACT | 1 | C2680R-H | MB:Cu Cu/Sn PLATED |
| 1 | HOUSING | 1 | ABS | UL-94HB |
| LTR | PART NAME | QTY | MATERIAL | REMARK |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm

P PROJECTION



ORDER INFORMATION

RCA-JR50E1-03-LF
SERIES | | | | LEADFREE
| | | | 03 WAY
| | | | EAR
| | | | 5.0mm
| | | | DIP 90°
| | | | JACK

DESCRIPTION: PIN JACK

煜倫股份有限公司

www.morethanall.com