



NOTE:


- MATERIAL:  
HOUSING:THERMOPLASTIC  
SLIDER:THERMOPLASTIC  
CONTACTS:COPPER ALLOY
- PLATING:  
CONTACTS:SEE ORDERING INFORMATION
- RATING:  
OPERATING VOLTAGE:50V  
CURRENT RATING:0.5A  
OPERATING TEMPERATURE:-55°C ~ +85°C

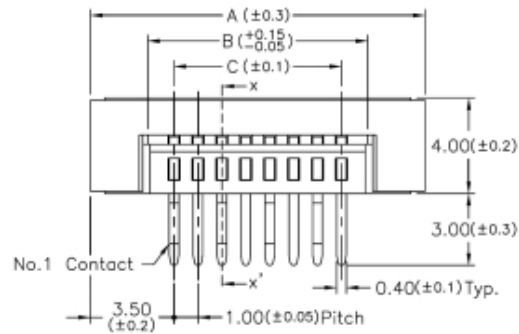


PCB Layout

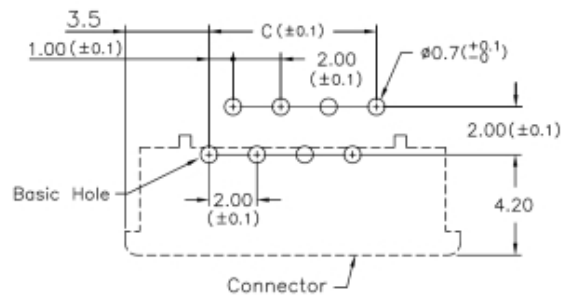

FPC/FFC INSERT DIRECTION

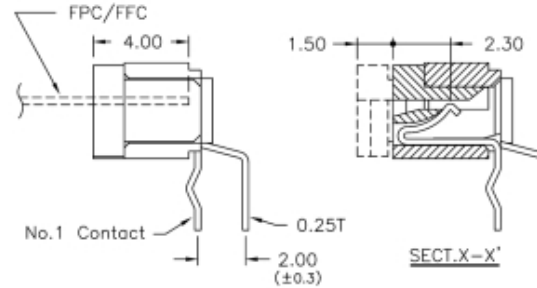

Applicable FPC

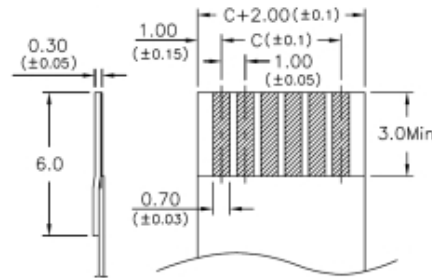

Part Number	Dimensions		
	A	B	C
04	10.00	5.20	3.00
05	11.00	6.20	4.00
06	12.00	7.20	5.00
07	13.00	8.20	6.00
08	14.00	9.20	7.00
09	15.00	10.20	8.00
10	16.00	11.20	9.00
11	17.00	12.20	10.00
12	18.00	13.20	11.00
13	19.00	14.20	12.00
14	20.00	15.20	13.00
15	21.00	16.20	14.00
16	22.00	17.20	15.00
17	23.00	18.20	16.00
18	24.00	19.20	17.00
19	25.00	20.20	18.00
20	26.00	21.20	19.00
21	27.00	22.20	20.00
22	28.00	23.20	21.00
23	29.00	24.20	22.00
24	30.00	25.20	23.00
25	31.00	26.20	24.00
26	32.00	27.20	25.00
27	33.00	28.20	26.00
28	34.00	29.20	27.00
29	35.00	30.20	28.00
30	36.00	31.20	29.00
31	37.00	32.20	30.00
32	38.00	33.20	31.00

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

FPA-RZBL50-xx-LF  
SERIES | | | | | LEADFREE  
DIP 90° | | | | | 04~32WAY  
ZIF | | | | | LONG 5.0mm  
L TYPE FOOT  
BOTTOM CONTACT

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com