

J

I

H

G

F


E

D

C




B

A

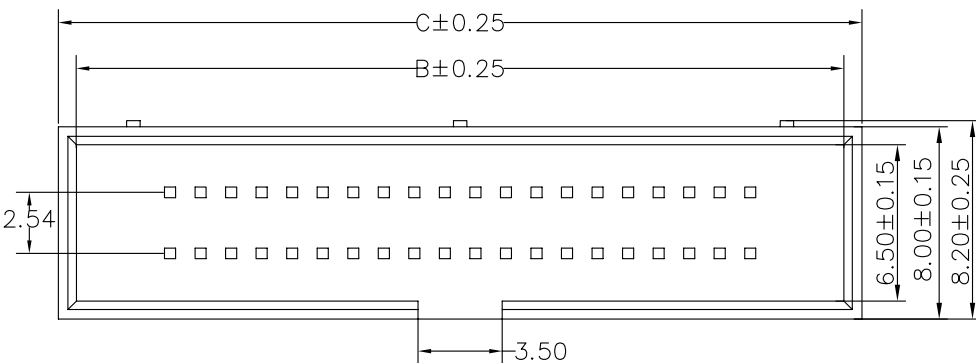

MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 DIELECTRIC WITHSTANDING : AC 500 V
 CONTACT RESISTANCE : 20 MOHM MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN

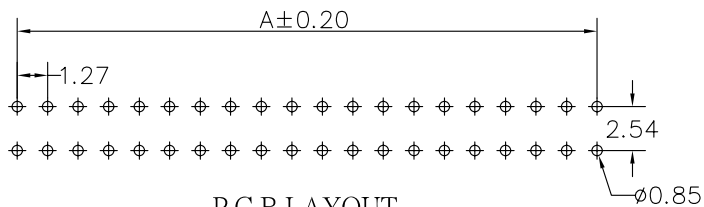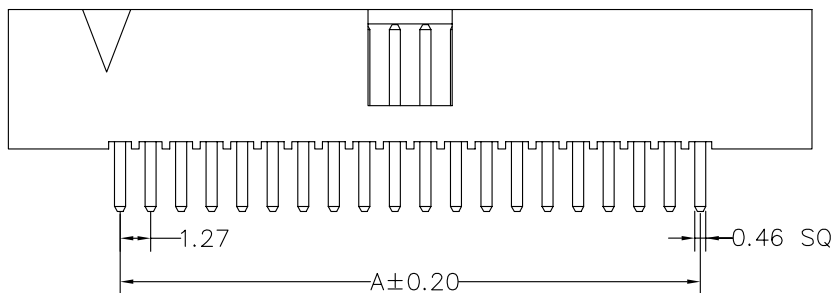

P.C.B LAYOUT

HB-D-xxx-LF
 LEADFREE

RoHS Compliant

NO. OF POS	A	B	C
8	3.81	11.70	13.10
10	5.08	12.97	14.37
14	7.62	15.51	16.91
16	8.89	16.78	18.18
20	11.43	19.32	20.72
26	15.24	23.13	24.53
30	17.78	25.67	27.07
34	20.32	28.21	29.61
40	24.13	32.02	33.42
44	26.67	34.56	35.96
50	30.48	38.37	39.77
60	36.83	44.72	46.12
64	39.37	47.26	48.66
68	41.91	49.80	51.20
80	49.53	57.42	58.82
100	62.23	70.12	71.52



PART NO. HB-D-xxx

DWG NO. HB-D-xxx

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE