


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(I)

SPECIFICATIONS

- 1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

- 1. MATERIAL:
 - Housing:PBT, UL 94V-0, Color: Green
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Boardlock:Copper Alloy.
 - Rivet:Copper Alloy.
 - Screw:Copper Alloy.
- 2. FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Rivet:Nickel Plated.
 - Screw:Nickel Plated.

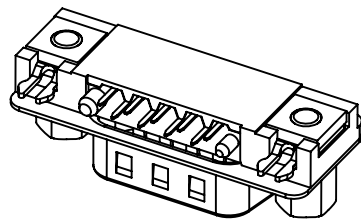

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PROJECTION

- X, ±
- .X ±
- .XX ± 0.25
- .XXX ± 0.13
- ANG ± 2°



ORDER INFORMATION

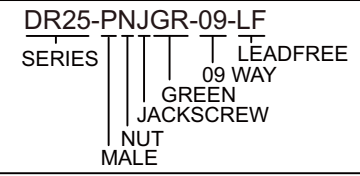

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: SLIM D-SUB 9 MALE CONNECTOR DIP SOLDER, RIGHT ANGLE