

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F

E

D

C

B

A

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC




Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
NYLON-6T

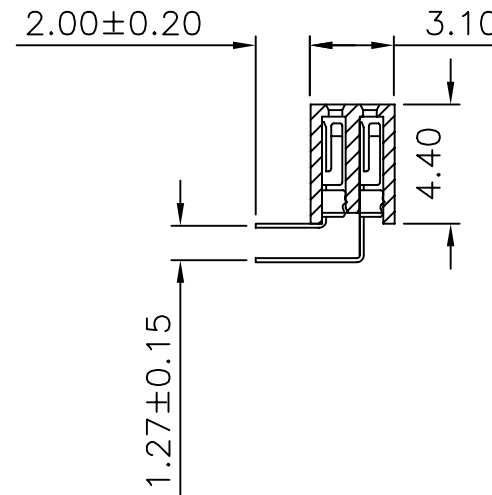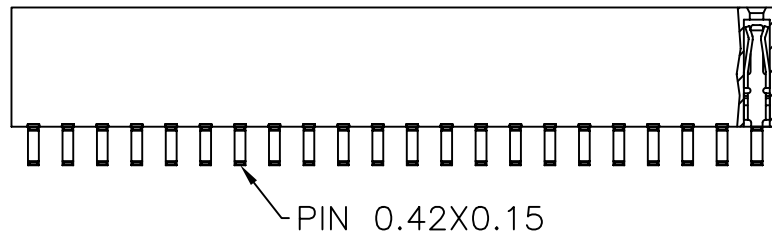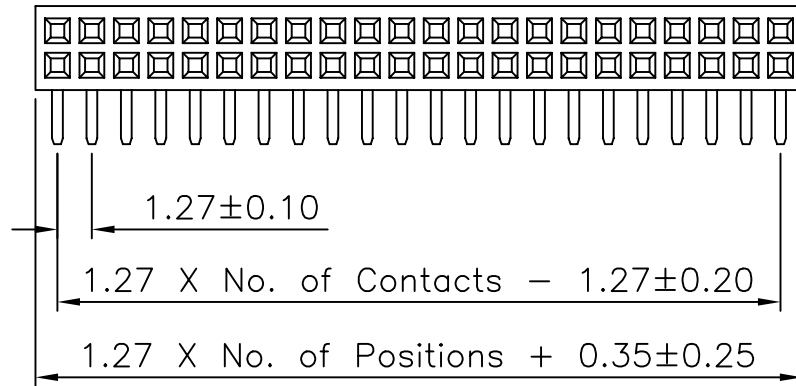

Recommended P.C.Board Hole Layout

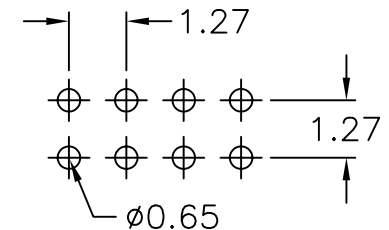

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. YA-R44-2Xxx

DWG NO. YA-R44-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
AWG

DESCRIPTION:

1.27 FEMALE HEADER 90° BASE 4.40

AREA

REVISIONS

HK

DATE

煜倫股份有限公司