



單導鋁箔麥拉結構表示圖



PET Mylar  
Aluminum Foil  
Conductive Tape



A: ~0.5MAX

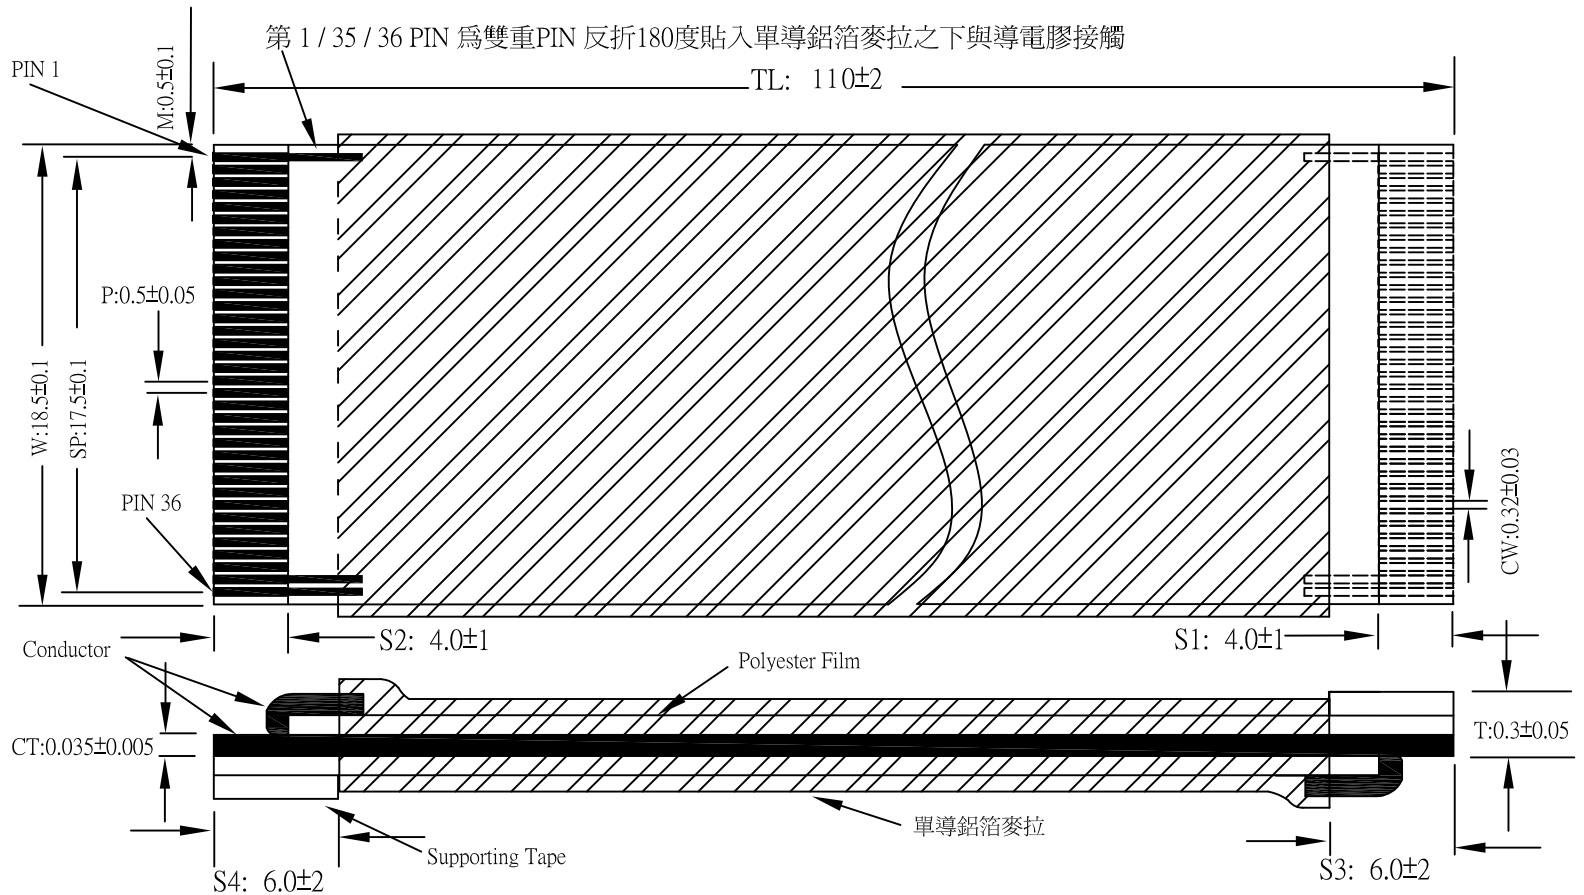

**Material:**

Insulation Film: Polyester White  
 Supporting Tape: Polyester Blue  
 Conductor: Tin Plated Flat Copper Wire  
 EMI Solution : PET Mylar + Aluminum Foil Conductive Tape

FPV-CB36S-110-LF  
 LEADFREE  
 RoHS Compliant



PART NO. FPV-CB36S-110		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 0.5PH 36PIN L=70mm D TYPE +鋁箔+3接地			
DWG NO. FPV-CB36S-110		DRAWING BY			AREA	REVISIONS	HK	DATE
FILE NO.		PROJECTION						
UNIT / mm	SCALE 1:1							

煜倫股份有限公司