

● MATERIALS: (RoHS Compliant)




Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated
 Front Shell: Steel Nickel Plated
 Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

PCB MOUNTING:

1.4mm (For PCB 1.6mm)

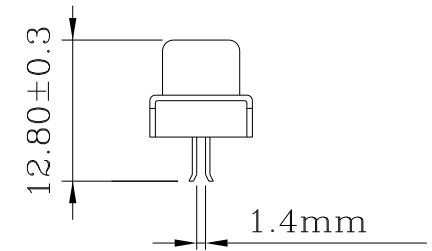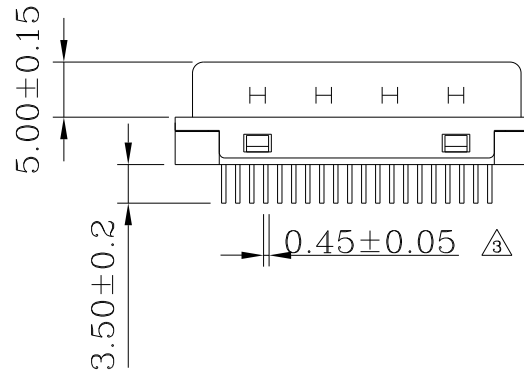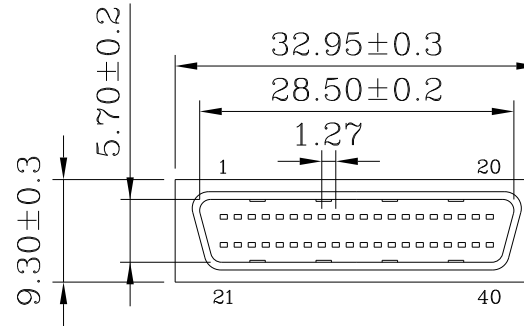

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 1°



ORDER INFORMATION

HPD-PE14-040-LF
 SERIES | LEADFREE
 40 WAY
 EDGE 1.4mm
 MALE

DESCRIPTION: 1.27mm (.050") Pin Type 40Pos Plug Connector Clip P.C.B Molded Type