

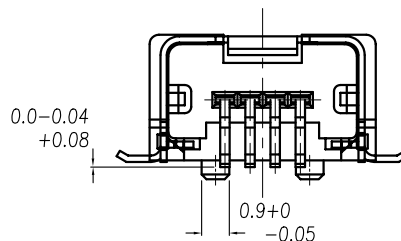



Recommend P.C.B LAYOUT

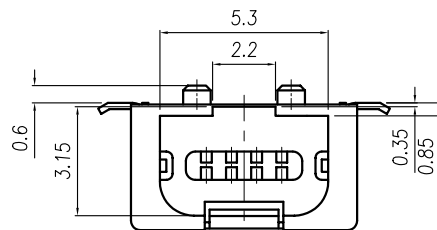

備註/Note:

1.安規/Safety:

- 1-1.規格/Rating:DC 30V/2A
- 1-2.絕緣阻抗/Insulation Resistance:500M ohm Min at DC 100V
- 1-3.絕緣耐壓/Dielectric Withstanding Voltage:AC 250V for 1 minute
- 1-4.接觸阻抗/Contact Resistance :30m ohm or less

2.材質/Material:

- 2-1.端子/PIN:磷銅/PHOSPHOR BRONZE
- 2-2.膠芯/HOUSING:NYLON
- 2-3.鐵殼/SHELL:不鏽鋼/STAINLESS STEEL

3.電鍍/PLATING:

- 3-1.端子/PIN:金10u"/GOLD 10u"
- 3-2.鐵殼/SHELL:SEE TABLE A

TABLE A

MINI USB 母座 成品(雙防呆)貝吉色	鍍錫/TIN
MINI USB 母座 成品(雙防呆)黑色	鍍錫/TIN
MINI USB 母座 成品(雙防呆)貝吉色	鍍錫/NICKEL
MINI USB 母座 成品(雙防呆)黑色	鍍錫/NICKEL

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. MSB-SW-4H2

DWG NO. MSB-SW-4H2

FILE NO. NY-US0XX

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.1
.XX ± 0.05
.XXX
AWG

DESCRIPTION:

MINI USB 母座 成品 (雙防呆)

AREA

REVISIONS

HK

DATE