


RECOMMEND P.C.B. LAYOUT
HOLE LAYOUT

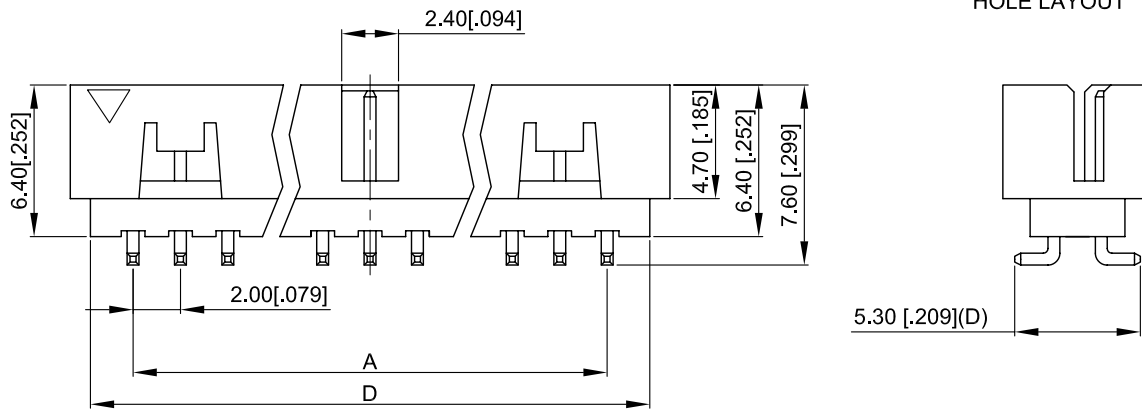

How to order Please replace "X" with appropriate coding listed in the table below.
Part Number

MATERIALS :

1. HOUSING : NYLON 6T. (UL 94V-0), BLACK.
2. TERMINAL : S.Q. 0.5mm BRASS, GOLD PLATING.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTAND VOLTAGE : 800V AC R.M.S. FOR 1 MINTUE.
3. INSULATION RESISTANCE : 5,000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.
5. MAX. PROCESSING TEMPERATURE : 230°C FOR 30 TO 60 SECONDS.

Number Of Position	DIMENSIONS					
	A	B	C	D	E	P
10	8.00	10.85	12.65	11.00	—	6.00
12	10.00	12.85	14.65	13.00	—	8.00
14	12.00	14.85	16.65	15.00	8.00	10.00
16	14.00	16.85	18.65	17.00	10.00	12.00
20	18.00	20.85	22.65	21.00	14.00	16.00
26	24.00	26.85	28.65	27.00	20.00	22.00
30	28.00	30.85	32.65	31.00	24.00	26.00
34	32.00	34.85	36.65	35.00	28.00	30.00
40	38.00	40.85	42.65	41.00	34.00	36.00
44	42.00	44.85	46.65	45.00	38.00	40.00
50	48.00	50.85	52.65	51.00	44.00	46.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

MPVK-VX-2Xxx-LF

SERIES | LEADFREE
2X05:10 WAY
2X25:50 WAY
NON POST
180°SMT

DESCRIPTION: 0.079"(2.00mm) Box Header, Molex Type Dual Row, SMD

www.morethanall.com