

P.C.B. LAYOUT


NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold PLATED OR GOLD/TIN PLATED
- 1.4 Shell:Steel,Nickel plated

2.SPECIFICATION

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 5000MW Min. at 500V DC
- 2.3 Dielectric Strength: 1000V Per minute
- 2.4 Operation Temperature: -55°C to+105°C

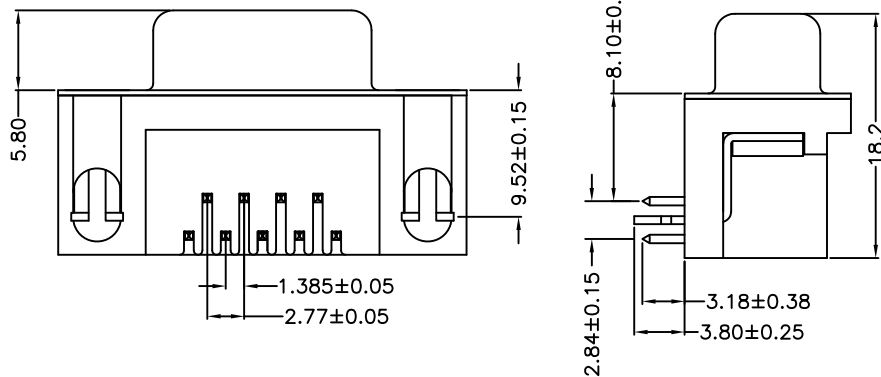

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±


DATE

.XXX±

ANG±

SIZE A4

P PROJECTION



ORDER INFORMATION

DR-SGNH-09-LF  
SERIES | | | LEADFREE  
| | | 09 WAY  
FEMALE | | | HEX SCREW  
| | | NUT  
| | | FULL GOLD

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DR9P母鉚附全金黑 8. 1