



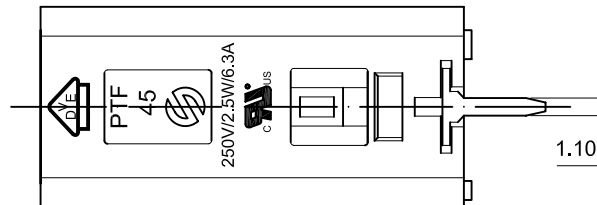

Recommend mounting holes

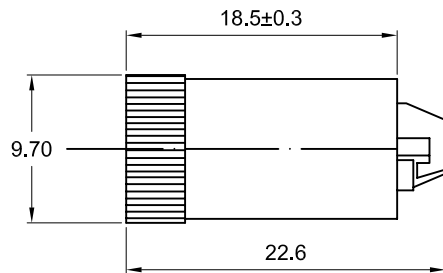

FSH-U10-5X20-LF
LEADFREE
RoHS Compliant

FUSE HOLDER PANEL MOUNT TYPE FOR FUSES

5.2X20mm   APPROVED

SPECIFICATIONS:

- *Rated current: 6.3A 250V
- *Insulation resistance at 500V DC: 100MΩ Min.
- *Contact resistance: 5mΩ at 1A DC
- *Dielectric strength for 60 seconds: AC 1000V min.
- *Plastic material for body and cover: PBT
- *Insulating body: Flame retarding UL94V0 thermoplastic material.
- *Contact: Nickel or tin plated copper alloy

 MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FSH-U10-5X20

DWG NO. FSH-U10-5X20

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: ϕ 5.2X20mm Fuse Holder

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

