
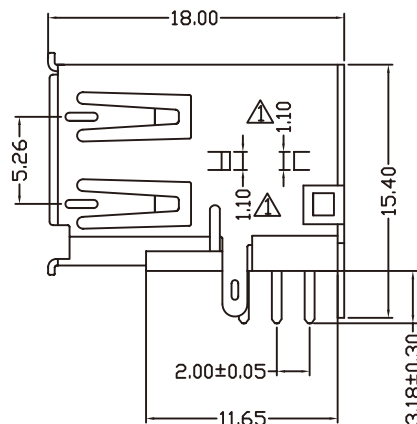


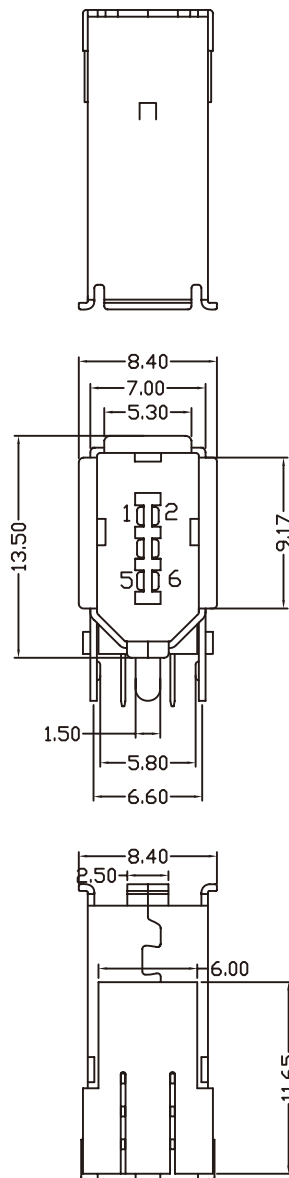

P.C.B.LAYOUT

ELECTRICAL CHARACTERISTICS :

CONTACT CURRENT RATING : 1AMPERES.

DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.

INSULATION RESISTANCE : 500 MEGOHMS MINIMUM AT DC 500V.

CONTACT RESISTANCE : 30 MILLIOHM MAXIMUM.

OPERATING TEMPERATURE : -55°C TO+105°C.

MECHANICAL CHARACTERISTICS :

CONTACT INSERTION FORCE : 3.0 KG MAXIMUM.

CONTACT SEPARATION FORCE : 1.5 KG MINIMUM.

MATERIALS :

CONTACT :BRASS

INSULATOR : P.B.T+ G.F.25% UL 94-VO RATED, L.C.P OR NL 6T.

SHELL : BRASS.

FINISHES :

CONTACTS :GOLD FLASHED ON MATING END,TIN-LEAD ON TERMINATION END.

SHELL :TIN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

1394-SU-06-LF

SERIES | LEADFREE
| 06 WAY
| UPRIGHT
| FEMALE

DESCRIPTION: IEEE 1394-6PIN側向90°DIP(F)