

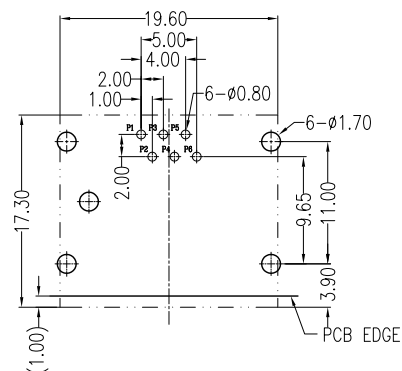




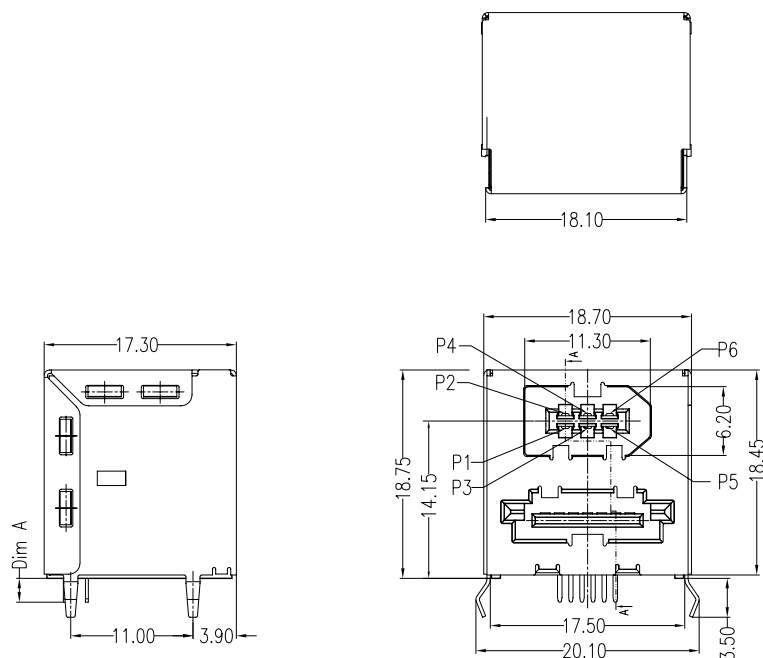

P.C.B Layout t=1.60mm



Unit: mm

P/N	Dim"A"
1394ESA-ARRD-0607	2.15

NOTES:

*Material

Housing : Nylon 46,UL 94-0 Rated

Contact : Brass,Gold plating over Nickel on contact area; Tin Plating on Solder Tail.

Shell(Outside): Brass, Nickel plating

*Electrical Specification

Operation Voltage:40 VAC max.

Current Rating: 1.5 Ampere per contact

Contact Resistance: 30mOHM Max

Insulation Resistance: 100M OHM MIN

Dielectric Withstanding Voltage:500V AC.

*Environmental

Operating Temperature : -55°C to +125°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

1394ESA-ARRD-0607-LF

SERIES

LEADFREE
06 TO 07 WAY
RED
90°SMT
FEMALE TO MALE

DESCRIPTION: IEEE 1394 Add Tail Male CRT