


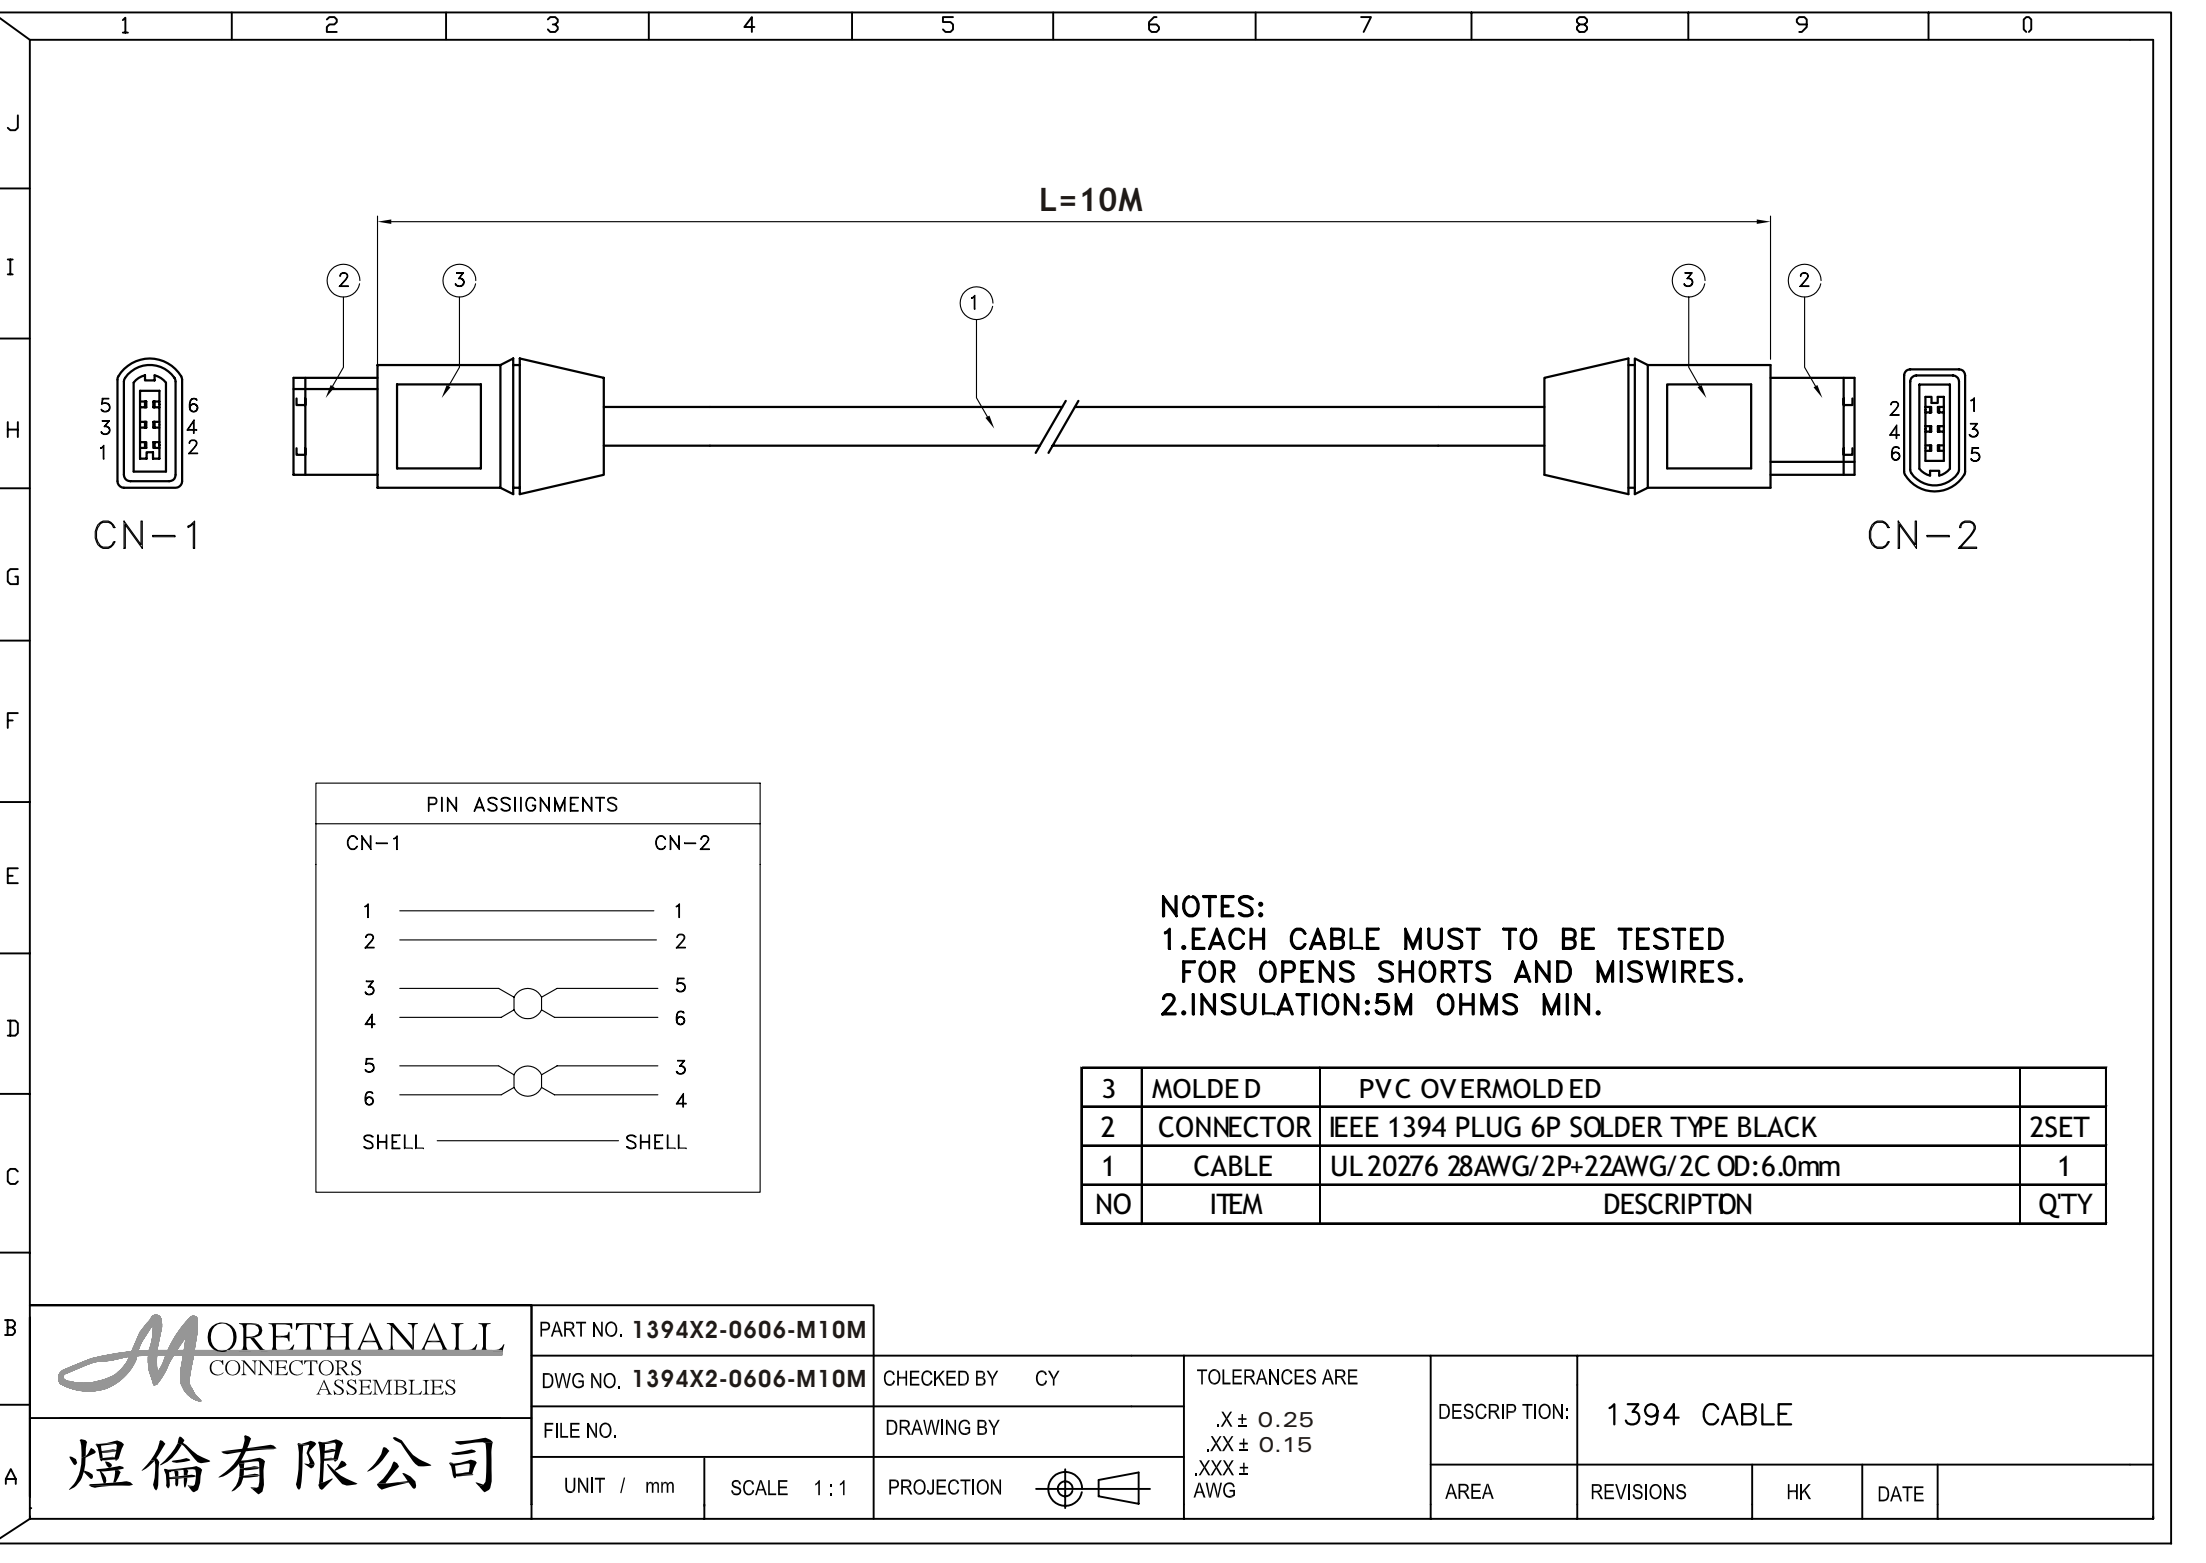

PIN ASSIIGNMENTS	
CN-1	CN-2
1	1
2	2
3	5
4	6
5	3
6	4
SHELL	SHELL

NOTES:
1.EACH CABLE MUST TO BE TESTED
FOR OPENS SHORTS AND MISWIRES.
2.INSULATION:5M OHMS MIN.

3	MOLDED	PVC OVERMOLDED	
2	CONNECTOR	IEEE 1394 PLUG 6P SOLDER TYPE BLACK	2SET
1	CABLE	UL 20276 28AWG/ 2P+22AWG/ 2C OD:6.0mm	1
NO	ITEM	DESCRIPTION	QTY

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. 1394X2-0606-M10M									
DWG NO. 1394X2-0606-M10M		CHECKED BY CY	TOLERANCES ARE .X ± 0.25 .XX ± 0.15 .XXX ± AWG	DESCRIP TION:	1394 CABLE				
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		