


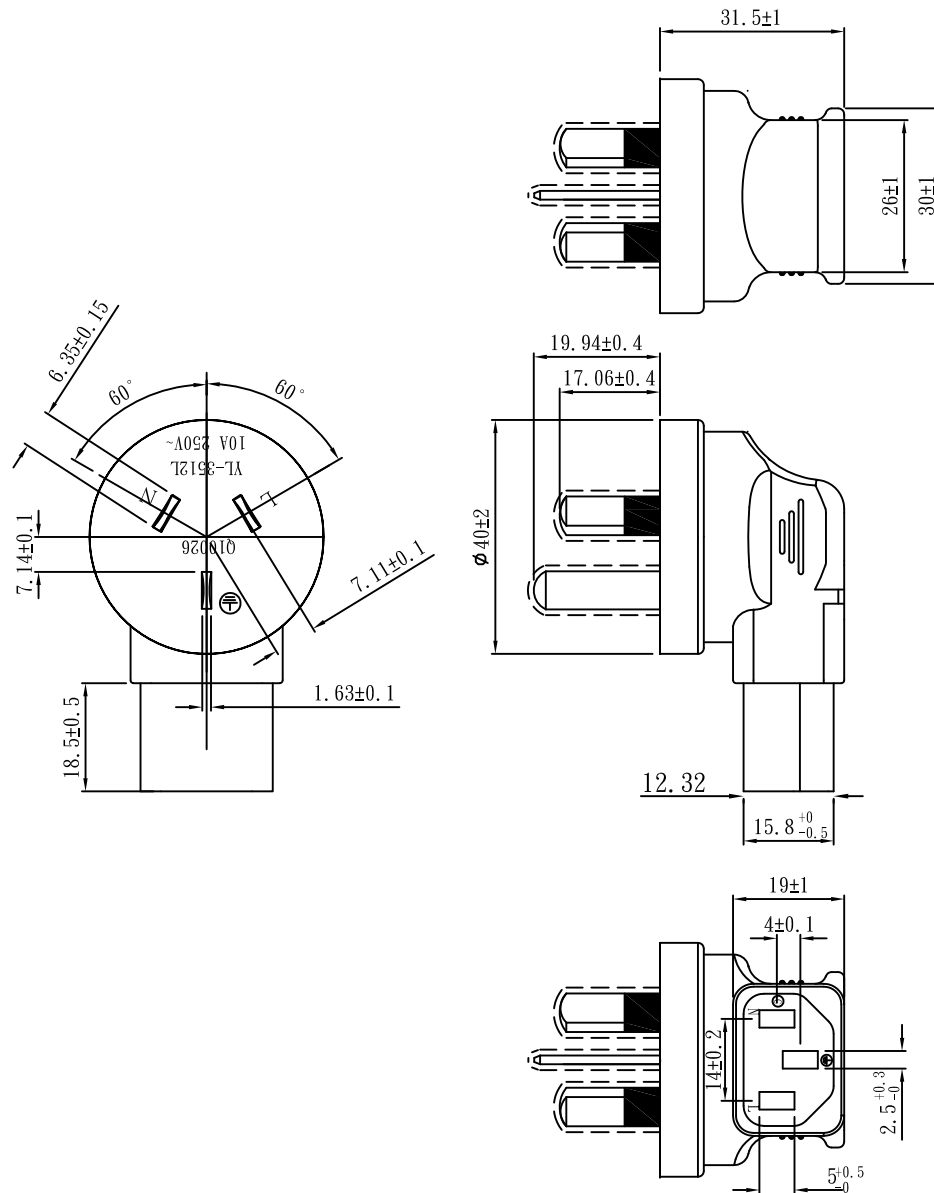

Note:

1. Rating: 10A 250V
2. Insulation Resistance: 100M Ω
3. Dielectric Voltage: 2000V/sec

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 1^\circ$

PPOJECTION

ORDER INFORMATION

ACAACF-EMU-0303-LF

SERIES

UPRIGHT

MOLDING

MALE TO FEMALE

LEADFREE

03 TO 03 WAY

DESCRIPTION: