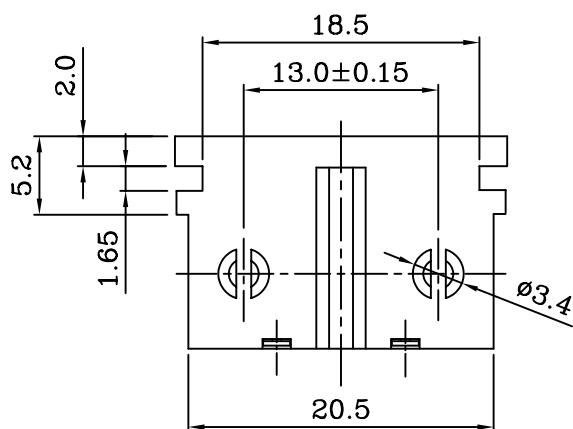
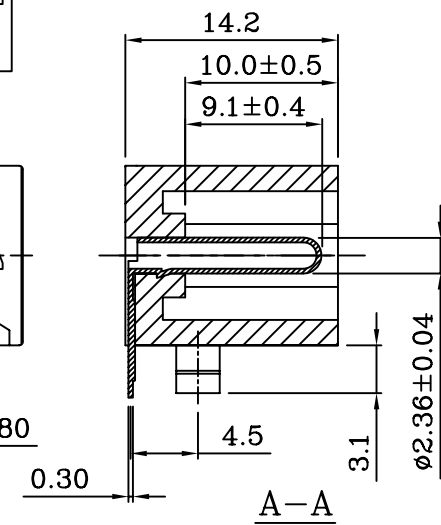
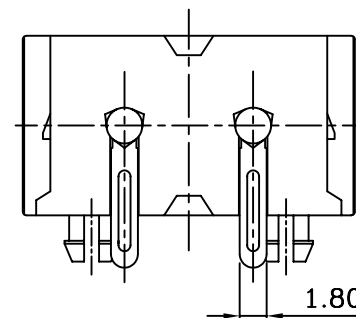

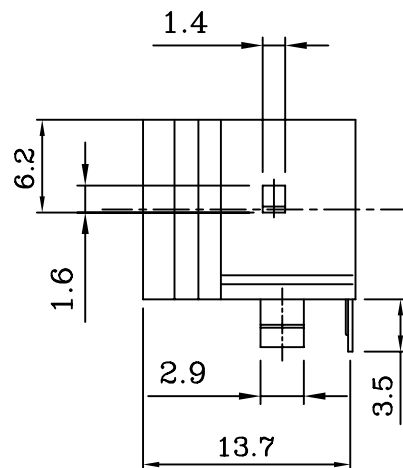
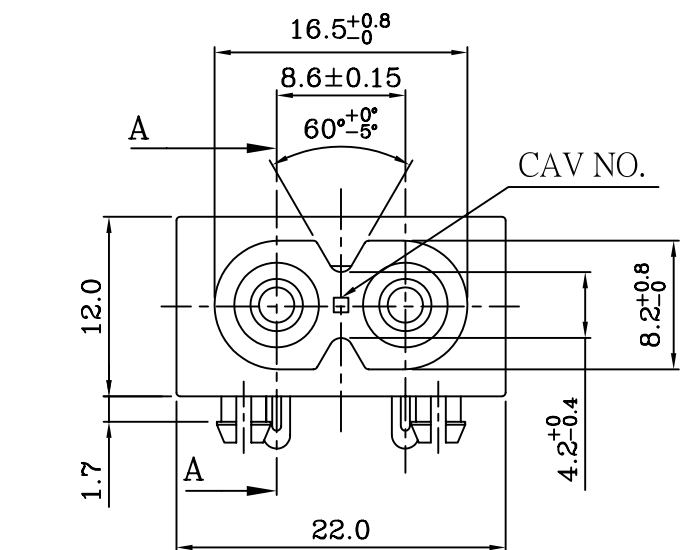


PANEL CUT-OUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

ACC-PRPCR45-02-LF

SERIES
LEADFREE
02 WAY
ROW PITCH 4.5mm
C TYPE
MALE
PANEL
DIP 90°

DESCRIPTION: