

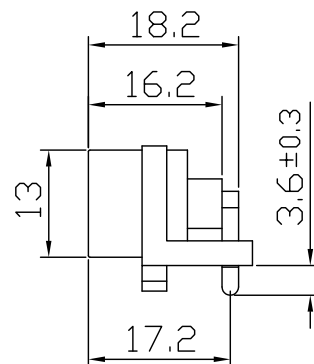
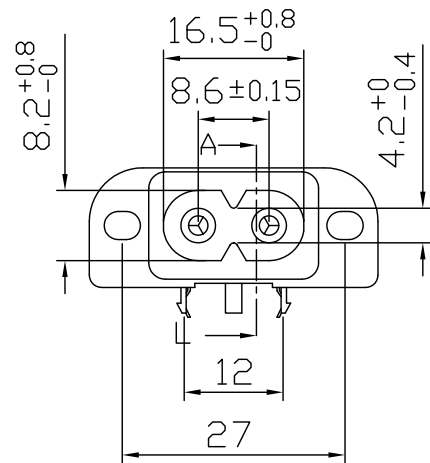
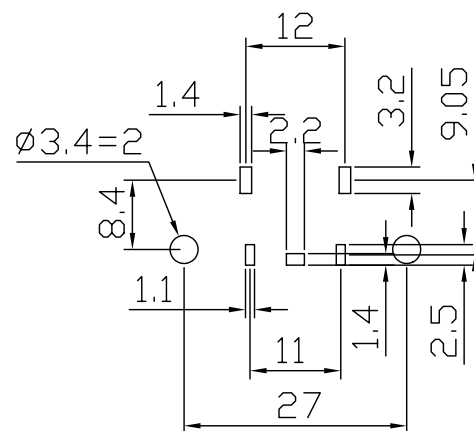



Current Rating: 2.5A/10A(UL) / 2.5A(VDE)
 Voltage Rating: 250V(UL) / 250V(VDE)
 Soldering: Brass, Tin Plated
 Contact: Brass, Tin Plated
 Body Insulator: PA66

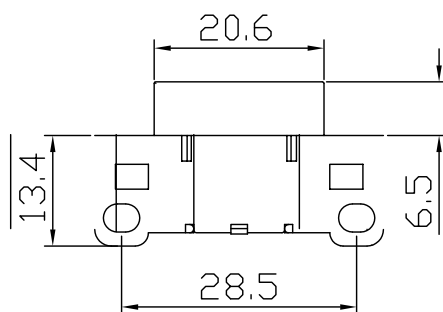

PCB LAYOUT

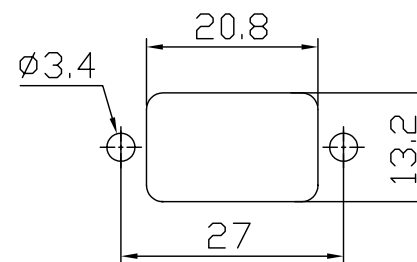

PANEL CUT-OUT

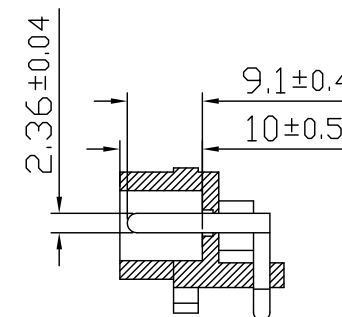

SECTION A-L

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

ACC-PRPEB-02-LF

SERIES
 MALE
 02 WAY
 BRACKET
 EAR
 PANEL
 DIP 90°
 LEADFREE

DESCRIPTION: