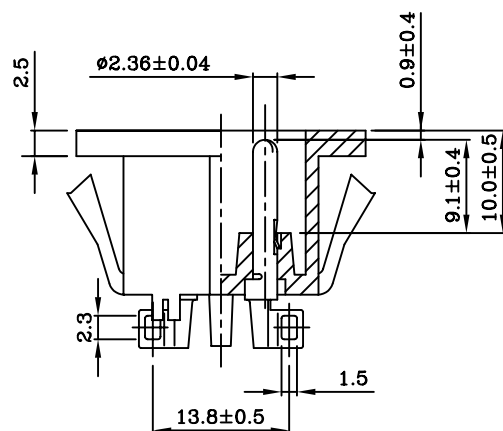
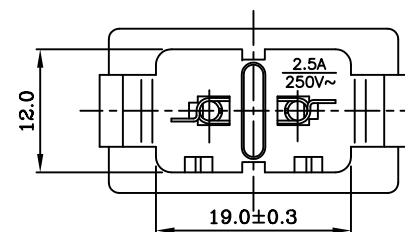

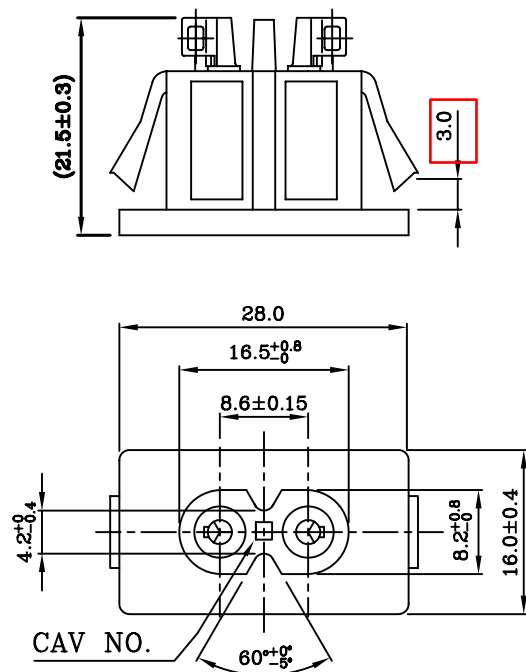


PANEL CUT-OUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V

Mark	Safety Regulation
cULus	cULus
CCC	CCC
VDE	VDE
EN10	ENEC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACC-PSHPA30-02-LF
SERIES | | | | LEADFREE
MALE | | | | 02 WAY
| | | | 3.0mm
| | | | PANEL FRONT
| | | | HORIZONTAL PIN
| | | | SOLDER

DESCRIPTION: