

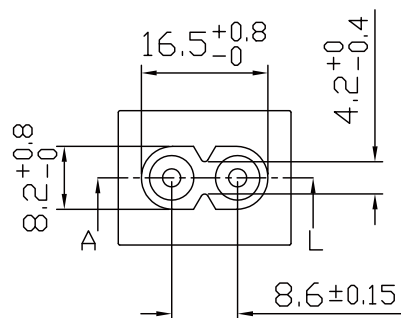
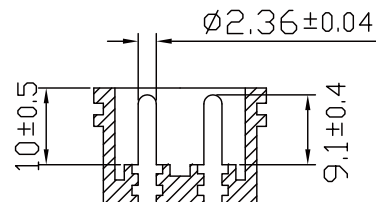


Current Rating: 2.5A/10A(UL) / 2.5A(VDE)
 Voltage Rating: 250V(UL) / 250V(VDE)
 Soldering: Brass,Matte-Tin Plated
 Contact: Brass,Nickel Plated
 Body Insulator: PA66



SECTION A-L

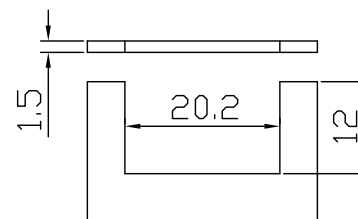

PANEL CUT-OUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

ACC-PSPC-02-LF
 SERIES | | | | LEADFREE
 | | | | 02WAY
 | | | | C TYPE
 | | | | PANEL
 | | | | SOLDER
 | | | | MALE

DESCRIPTION: