

产品说明 Product Description:

1.表面处理 Surface treatment:

素材None

2.外观 Appearance:

>30CM距离, <5S目视, 无腐蚀、刮伤、氧化

No corrosion, scratches, oxidation on surface

Inspection condition:

Inspect from >30cm away and for <5 seconds

3.环保: 符合ROHS&REACH

RoHS&REACH compliance: Yes

4.备注 Note:

拉力测试: 单PIN拔出力1.5~2.2kg.

中限4.0*2.0mm公端,三片吊重2.5~5.0kg.

材质

黄铜C2680

Material

包装数量





4500pcs/Reel

Packing Q' TY

电线导体规格

16-20AWG/18-20AWG(UL)

Conductor

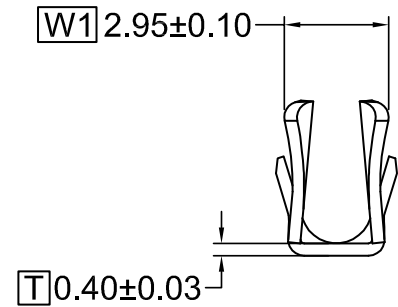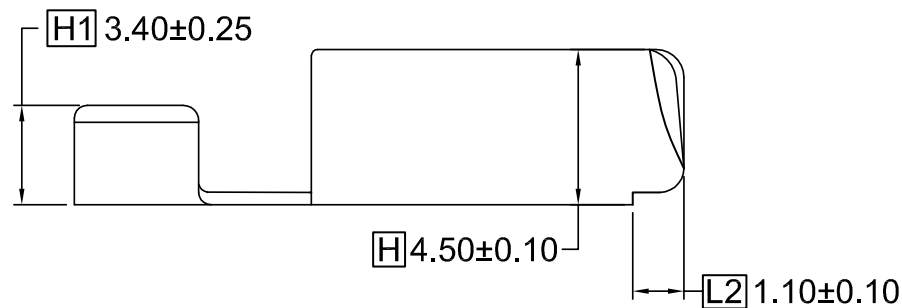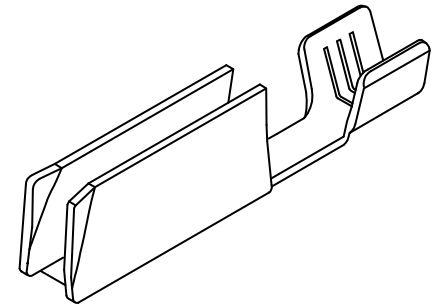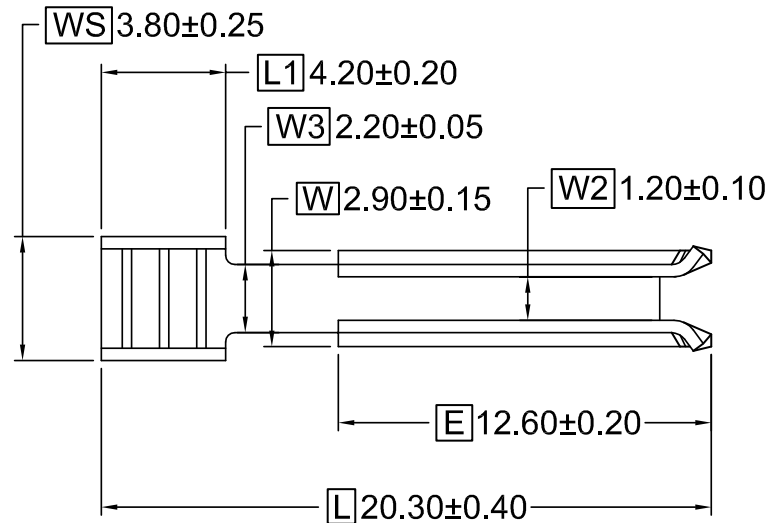

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$

照片框

ORDER INFORMATION

ACF-FBS29-16-LF
SERIES
LEADFREE
16~20 AWG
SPRING 2.9W
BRASS
FEMALE TERMINAL

DESCRIPTION: