

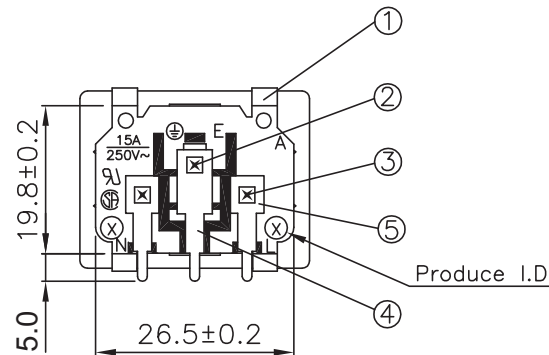
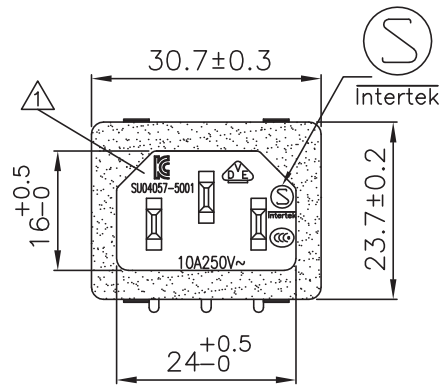






5	Soldering PIN Brass Strip t=0.8mm Tin-Plated	2
4	Soldering PIN Brass Strip t=0.8mm Tin-Plated	1
3	Contact PIN Brass Strip t=2mm Ni-Plated	2
2	Contact PIN Brass Strip t=2mm Ni-Plated	1
1	Body Insulator NYLON PA66	1

Rating:15A 250V AC
 Approvals:UL/CSA
 Rating:10A 250V AC
 Approvals:VDE/SEMKO/CCC/KTL

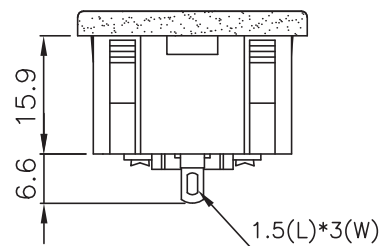

PANEL CUTOUT
 THICKNESS 0.8mm~1.5mm

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
 .X ± 0.30
 .XX ± 0.10
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

ACF-PRPA-03-LF
 SERIES T T LEADFREE
 03WAY
 PANEL FRONT
 DIP 90°
 MALE

DESCRIPTION: