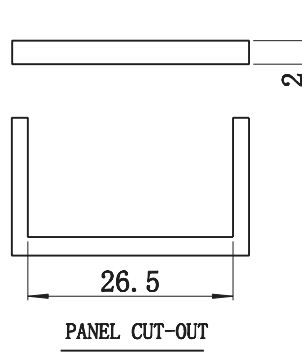
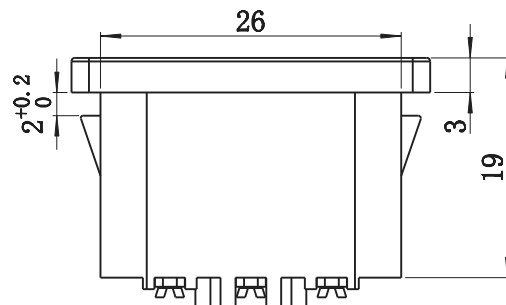
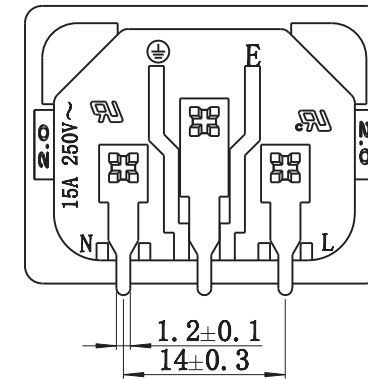
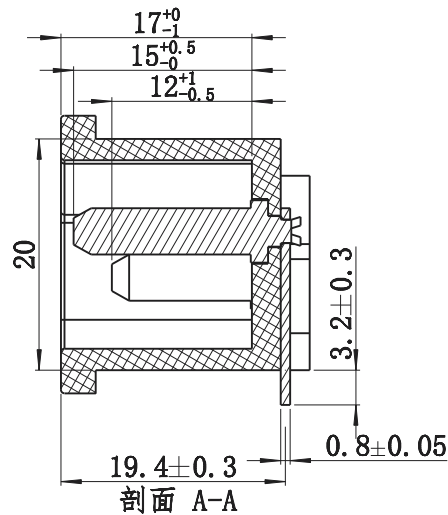
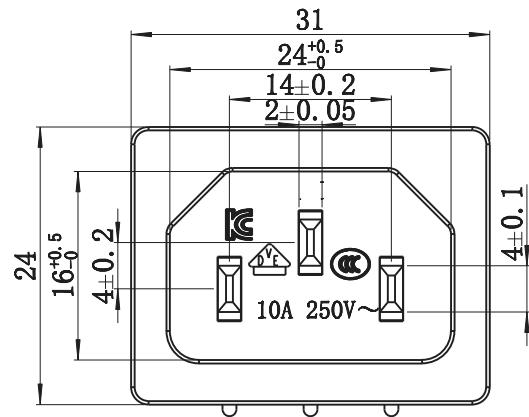


NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES $\pm 0.20\text{mm}$.

Rating:

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: $\geq 60\text{N}$

Operating Life: ≥ 6000 cycles

Withstand Voltage: Between all terminals: 2500VAC (50-60Hz) 1min

Terminals to Base: 3750V AC (50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: $\geq 100\text{M}\Omega$ 500V DC

Body Material: PBT 94V-2~0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

ACF-PRPA20-03-LF

SERIES
LEADFREE
03WAY
2.0mm
PANEL FRONT
DIP 90°
MALE

DESCRIPTION: