




SPECIFICATIONS

1. Rating: 15A 250VAC
2. Dielectric Strength: AC 2000V 1 Minute
3. Insulation Resistance: MORE THAN 100M Ω at DC 500V
4. Certification: UL
5. This device is intended to be wired with Type SJT, NO.18/3C TO NO.14/3C AWG Flexible cord

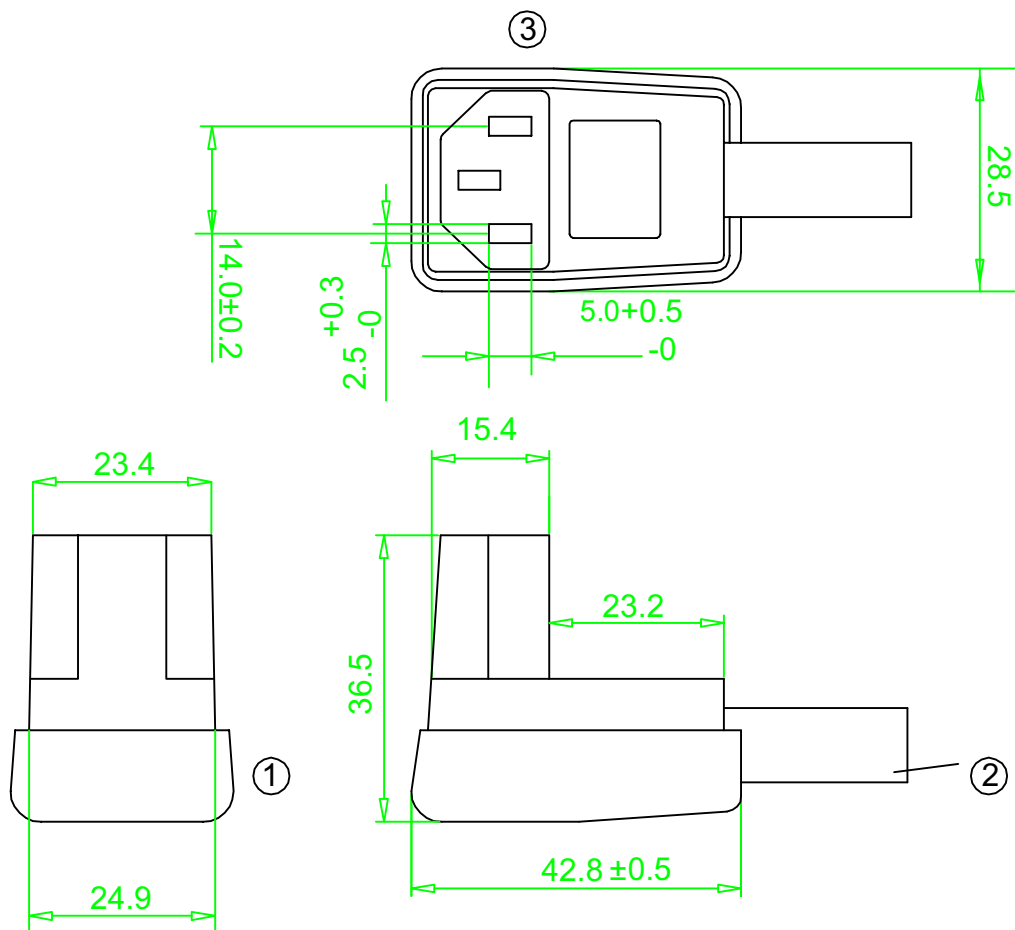

1	BODY	1	NYLON#66	94V-2	or 94V-0
2	CORD	1	PVC	94V-0	
3	TERMINAL	3	Bsp1-1/2H	t=0.8	Ni-PLATED
4	PLATE	1	NYLON#66	94V-2	
5	SCREW	6	鐵鍍鎳		
編號	零件名稱	數量	材	質規	格加工處理

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

ACF-SARU-03-LF
SERIES | | | LEADFREE
| | | 03 WAY
| | | U TYPE
| | | 90°
| | | ASSEMBLY
| | | FEMALE

DESCRIPTION: