

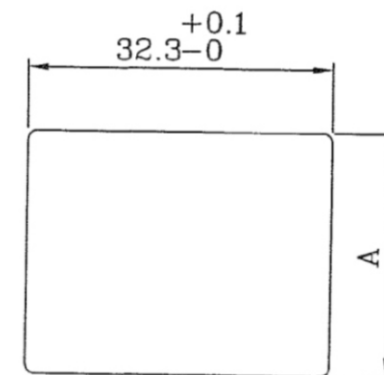
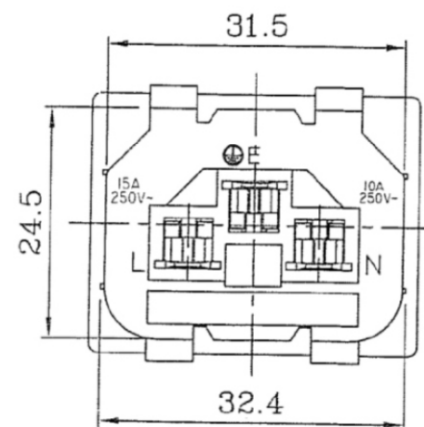
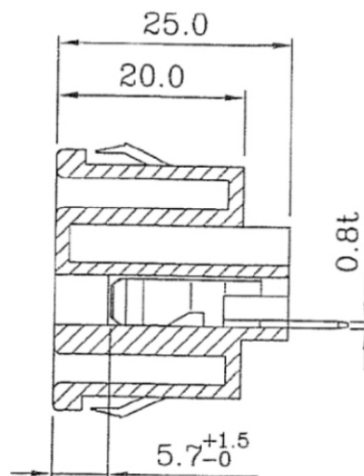


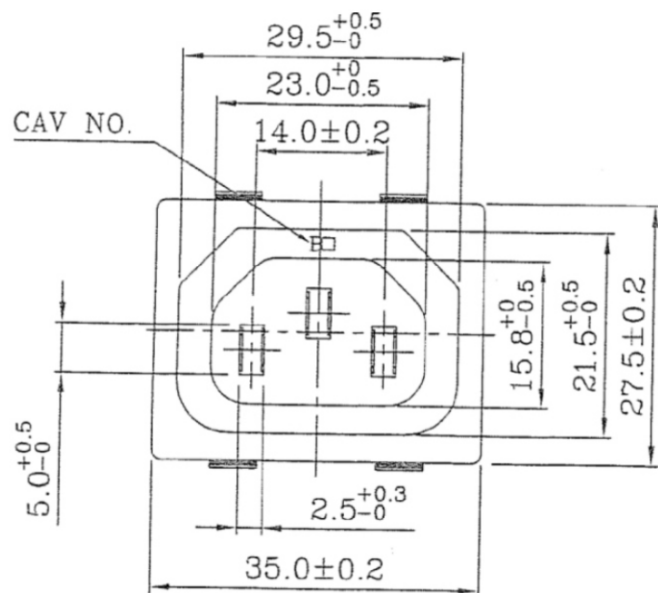

PANEL CUT-OUT

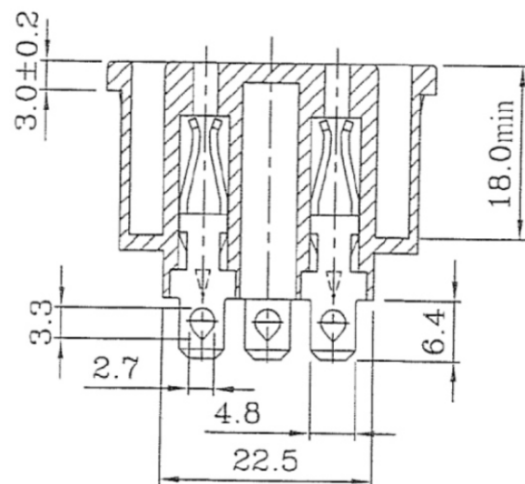

THICKNESS	A
0.8t ~ 1.0t	25.4
1.0t ~ 1.2t	25.5
1.2t ~ 1.5t	25.6
2t	25.7
3t	25.7

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating:AC 15A 250V	
Mark	Safety Regulation
cULUS	cULUS
Rating:AC 10A 250V	
Mark	Safety Regulation
VDE	VDE
CCC	CCC
SEMKO	SEMKO
DEMKO	DEMKO
FIMKO	FIMKO
NEMKO	NEMKO

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-SQ4PAHT-03-LF

SERIES T LEADFREE
03WAY
HORIZONTAL TERMINAL
PANEL FRONT
FEMALE 4.8mm
QUICK TAB

DESCRIPTION: