
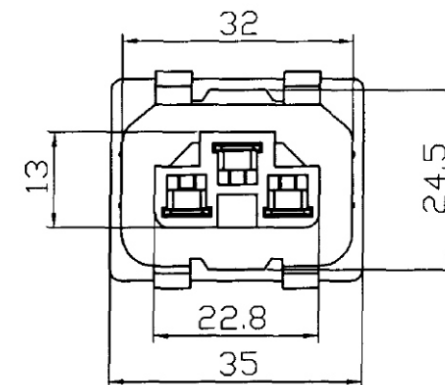
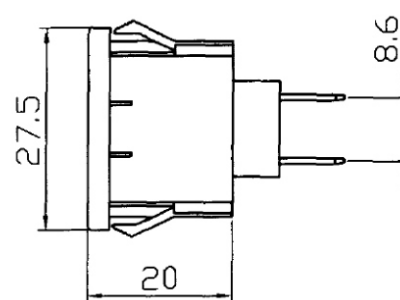
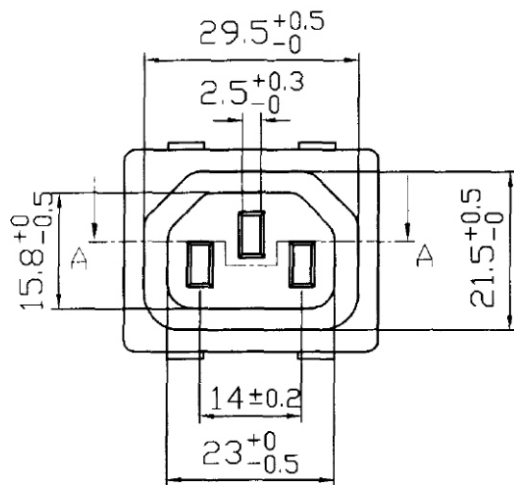


SECTION A-A

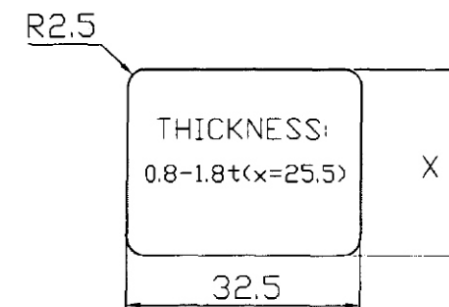

PANEL CUT-OUT

10A/15A 250V~

1. SOLDERING: PIN BRASS STRIP 0.8X3T TIN PLATING
2. CONTACT: PIN BRASS STRIP 0.8T TIN PLATING
3. BODY INSULATOR: NYLON 66

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-SQ6PAxxHT-03-LF

SERIES

FEMALE

QUICK TAB

LEADFREE

03WAY

HORIZONTAL TERMINAL

08~18:0.8t~1.8t

PANEL FRONT

6.4mm

DESCRIPTION:

- 1. Ratings IEC : IEC 60320
- 2. Ratings UL : E152974
- 3. Ratings CSA : 623301
- 4. VDE approval : Yes
- 5. Dielectric Strenght : 2000VAC being applied between all terminals There shall be no dielectric breakdown.
- 6. Operationg temperature : -25°C ~ +85°C
- 7. Degree of Protection : This specification applies to 3P AC appliance outlet for case mount of the following rated for cold condition, for class I equipment only, the pins temperature should not exceed to 70°C.
- 8. Material housing : 94 V2

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-SQ6PAxxHT-03-LF

SERIES

FEMALE

QUICK TAB

03WAY

08~18:0.8t~1.8t

PANEL FRONT

6.4mm

LEADFREE

HORIZONTAL TERMINAL

DESCRIPTION: