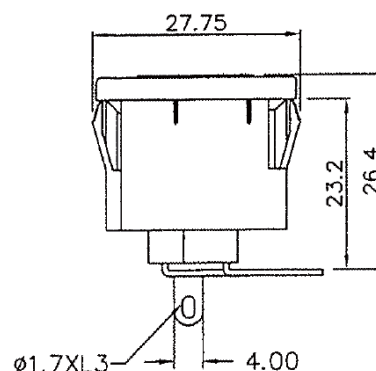
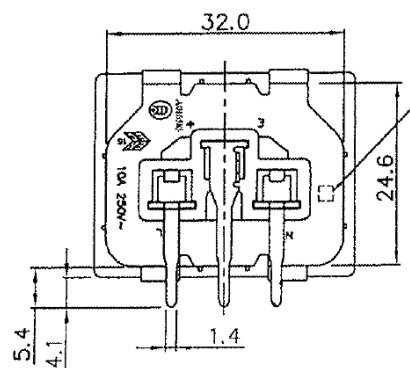
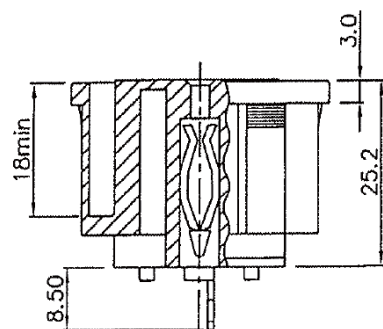
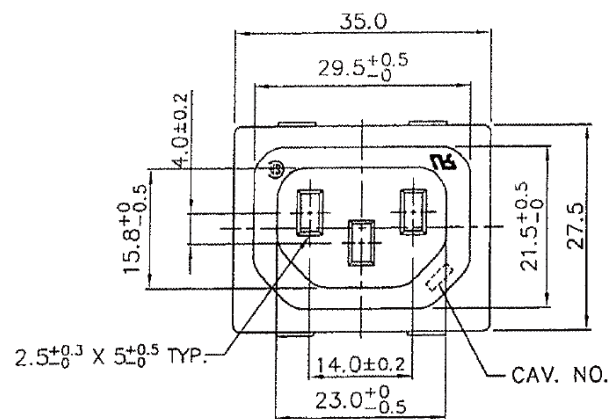


## SPECIFICATION

### A. MATERIAL:


1. HOUSING: NYLON 66 FLAMMABILITY UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN-PLATED

### B: CHARACTERISTICS:

1. RATING: 10A 250V~
2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

### C: APPROVALS:

UL, CSA, ENEC & CCC



### THICKNESS:

- 0.8~1.2t X=25.2  
1.3~2.0t X=25.4

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ± 0.3  
.XX ± 0.2  
.XXX ± 0.1  
ANG ±

PPOJECTION

照片框

### ORDER INFORMATION

ACF-SRPA-03-LF  
SERIES | T | LEADFREE  
03WAY  
PANEL FRONT  
DIP 90°  
FEMALE

DESCRIPTION: