

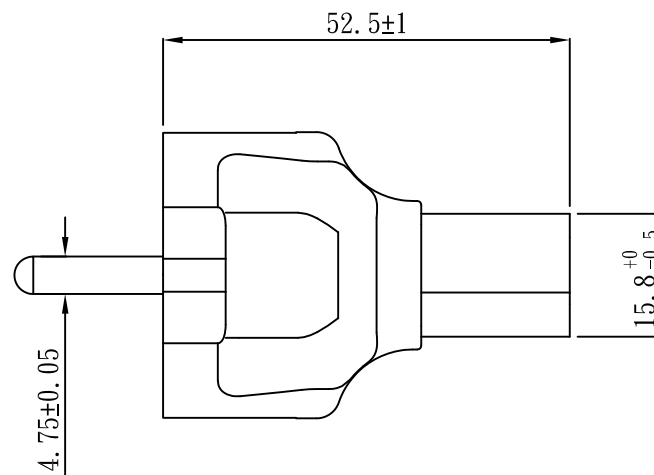
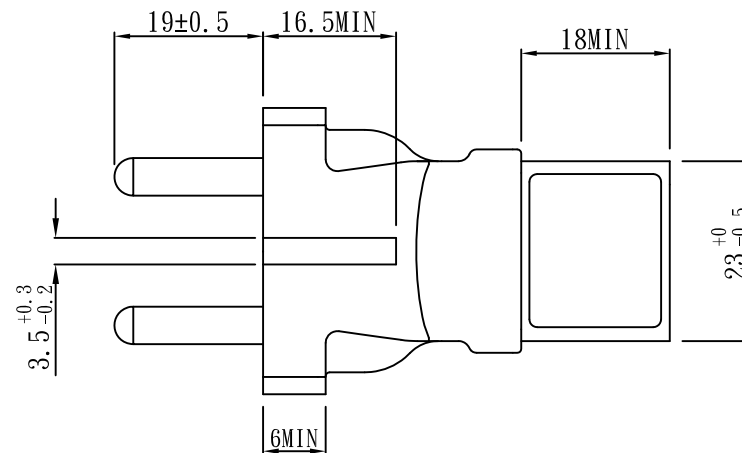


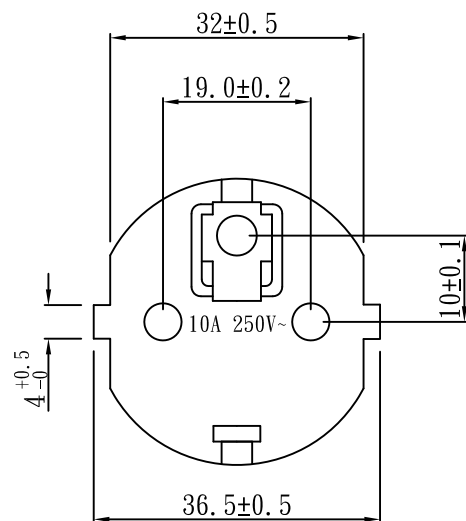

Note:

1. Rating: 10A 250V
2. Insulation Resistance: 100M Ω
3. Dielectric Voltage: 2000V/sec

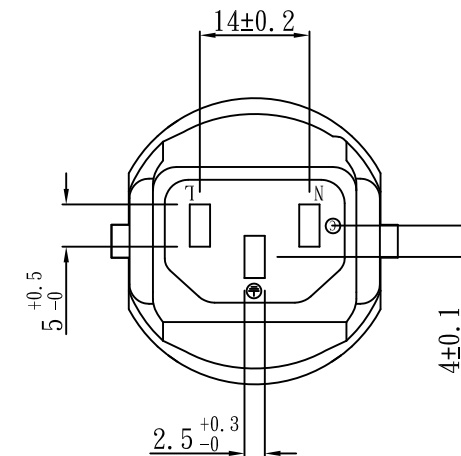

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

ACFACR-AM-0302-LF

SERIES

LEADFREE

03 TO 02 WAY

MOLDING

FEMALE TO MALE

DESCRIPTION: