



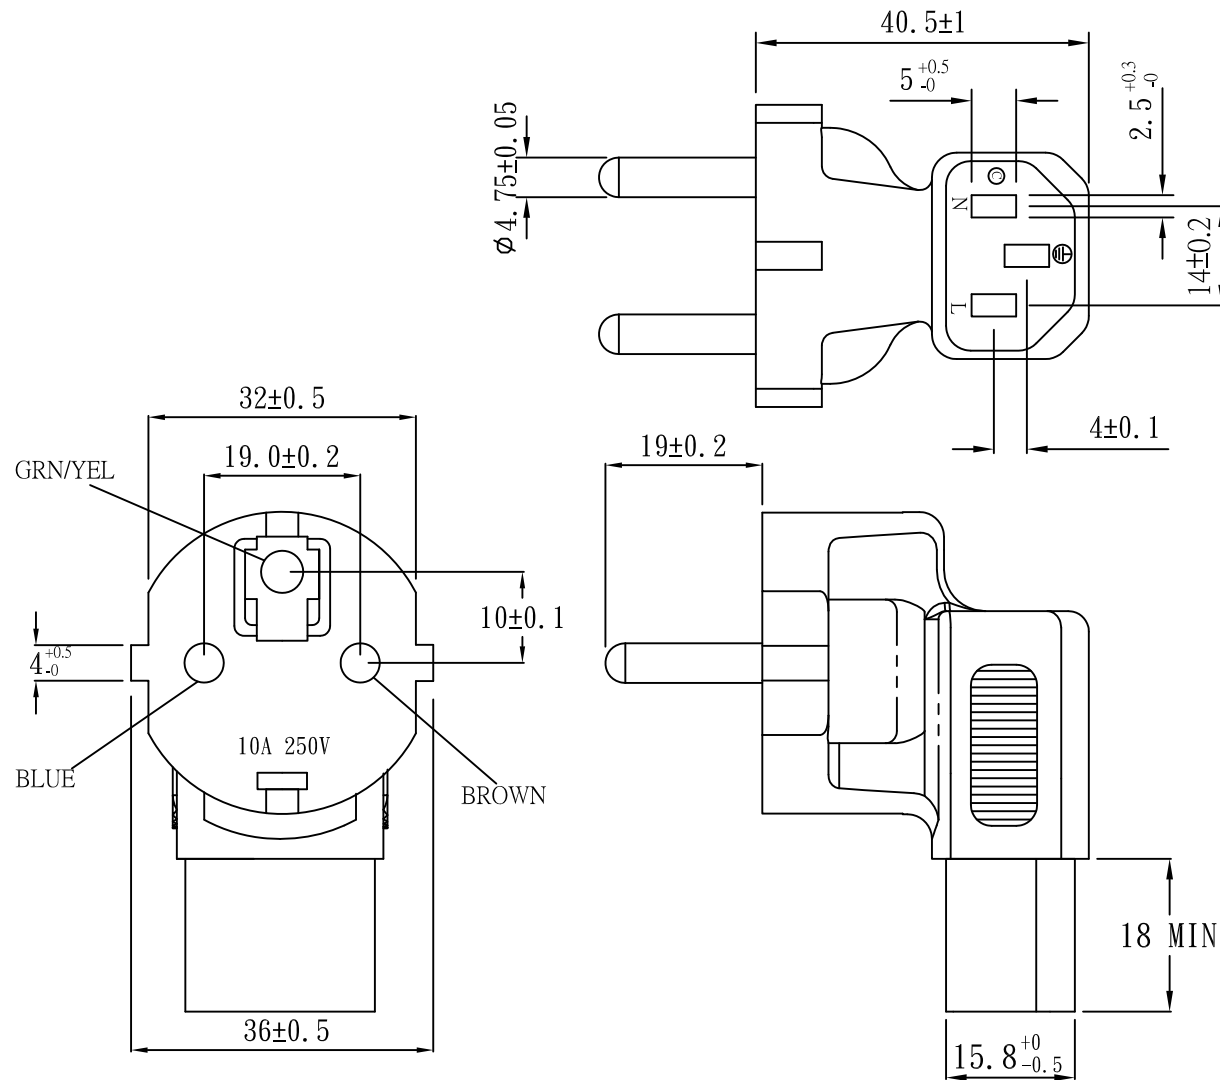

Note:

1. Rating: 10A 250V
2. Insulation Resistance: $100 \text{ M}\Omega$
3. Dielectric Voltage: 2000 V/sec

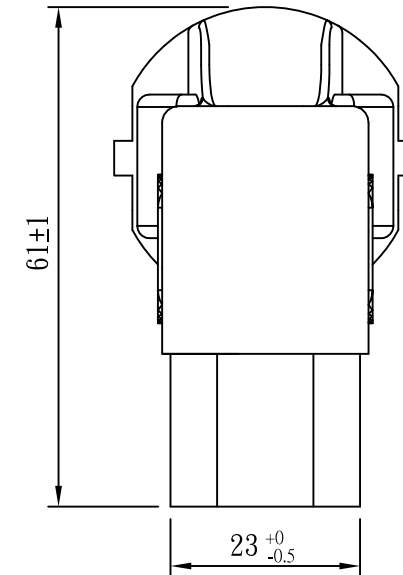

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.50
.XX ± 0.20
.XXX ± 0.10
ANG $\pm 1^\circ$

PPOJECTION

ORDER INFORMATION

ACFACR-AMU-0302-LF

SERIES

LEADFREE
03 TO 02 WAY
UPRIGHT
MOLDING
FEMALE TO MALE

DESCRIPTION: