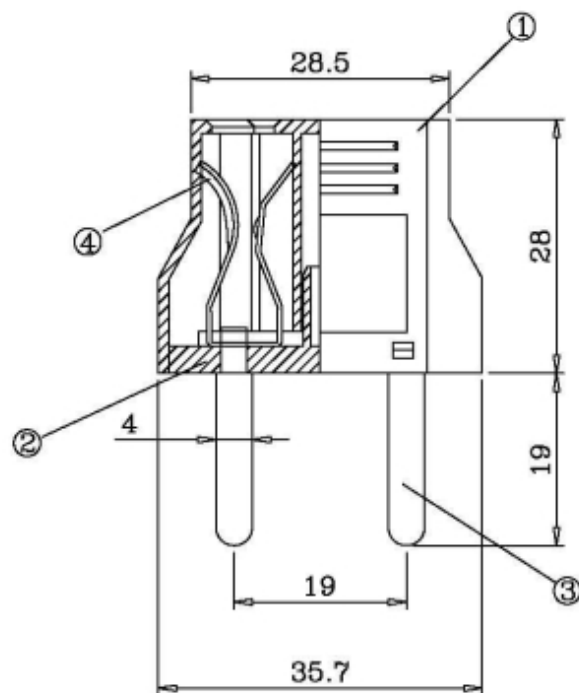
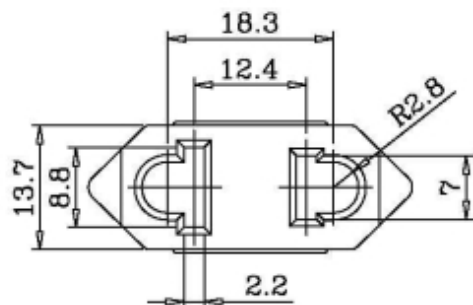


Specifications

1. Rating: 10A 110V-250VAC
2. Insulation Resistance: DC 500V 100MΩ (min)
3. Dielectric Strength: 2000VAC/1 Minute
4. FORCES NECESSARY TO INSERT AND TO WITHDRAW THE CONNECTOR: 1kg~5kg

4	夾片(圓扁插)	2	Bspl-1/2H	$\sqrt{0.4}t=0.5$	Ni-Plated
3	圓端子	2	Bspl-1/2H	ø4	Ni-Plated
2	底座(圓孔)	1	Nylon#66	94V-2	
1	外殼(圓扁孔)	1	Nylon#66	94V-2	
編號	零件名稱	數量	材 質	規 格	加 工 處 理

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ACFACR-AS-0202-LF

SERIES

LEADFREE

02 TO 02 WAY

FEMALE TO MALE

DESCRIPTION: