


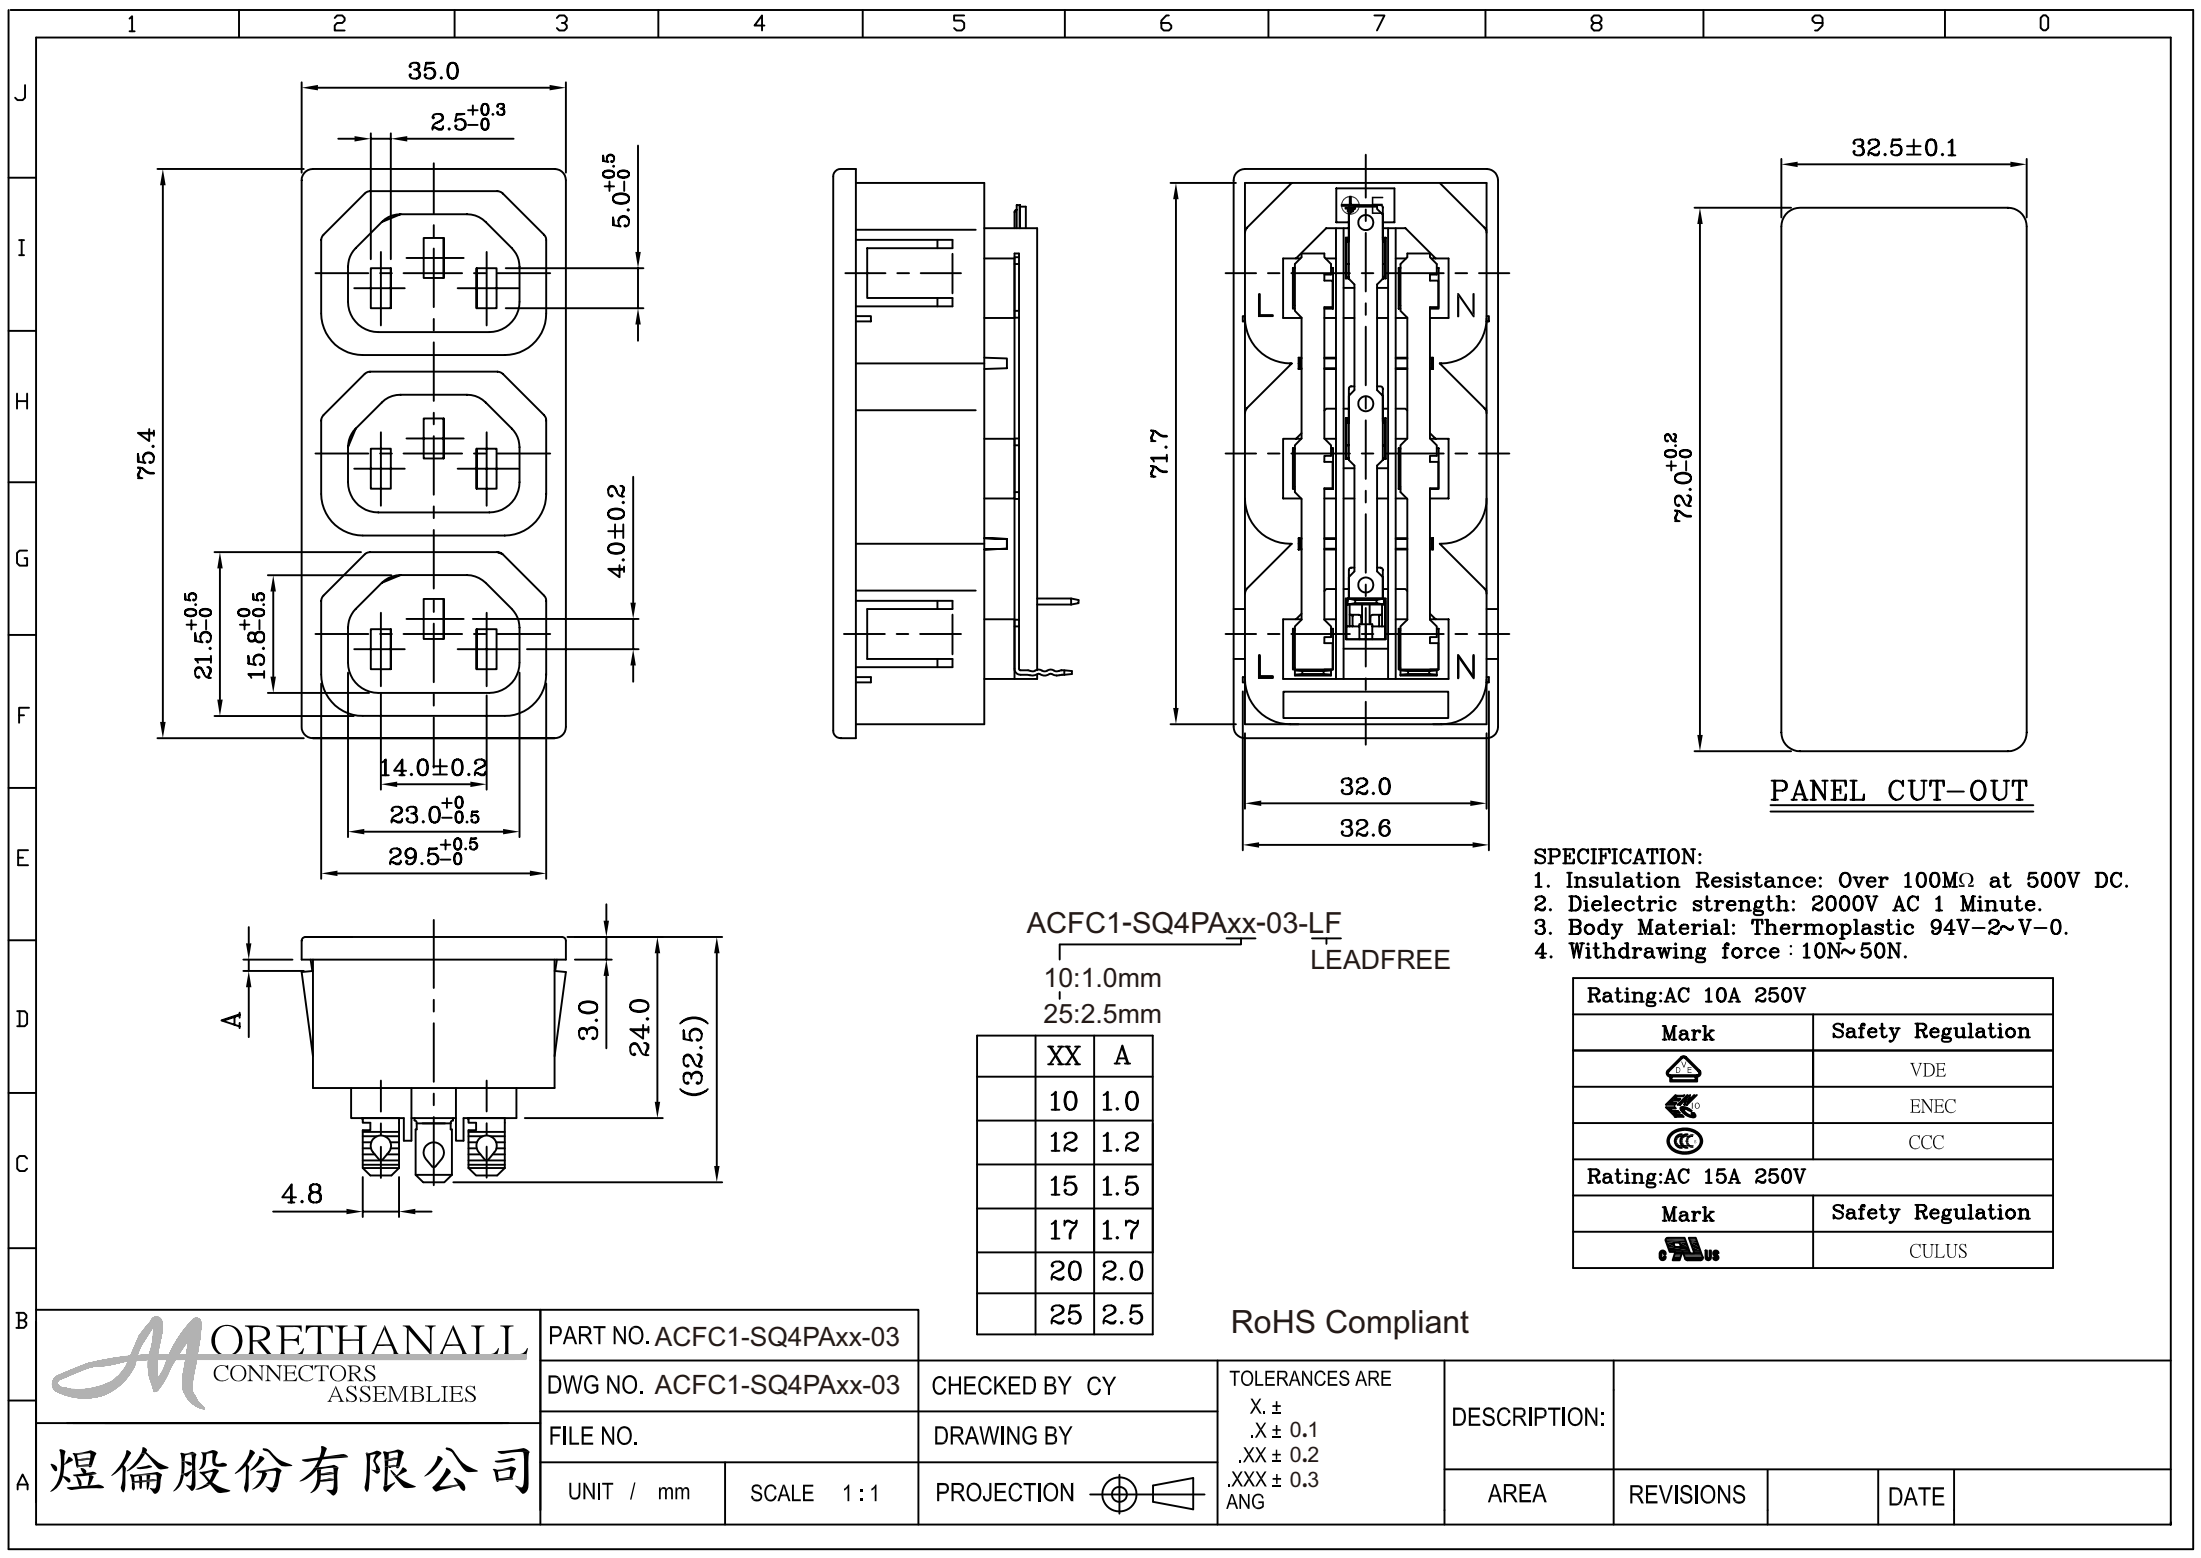

- SPECIFICATION:
1. Insulation Resistance: Over 100MΩ at 500V DC.
 2. Dielectric strength: 2000V AC 1 Minute.
 3. Body Material: Thermoplastic 94V-2~V-0.
 4. Withdrawing force : 10N~50N.

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. ACFC1-SQ4PAxx-03

DWG NO. ACFC1-SQ4PAxx-03

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X, ±
.X ± 0.1
.XX ± 0.2
.XXX ± 0.3
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司