





1. PHYSICAL DIMENSIONS:

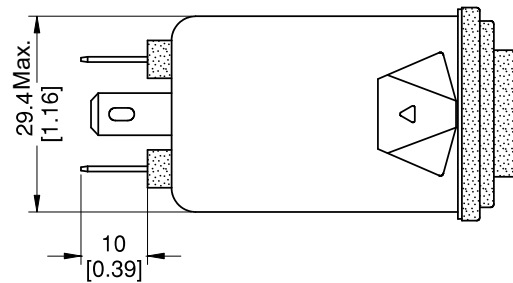

SUGGESTED PANEL CUTOUT (MOUNTING FROM FRONT)

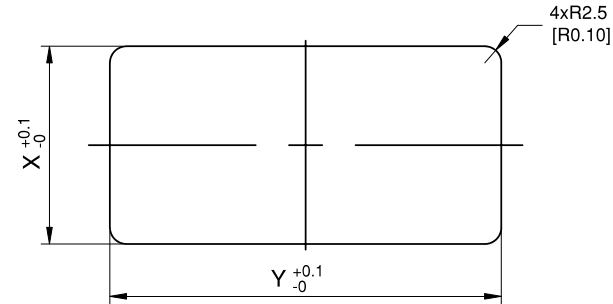

Panel Thickness	X(Suggested)	Y(Suggested)
0.8mm < t ≤ 1.0mm	29.7	61.8
1.0mm < t ≤ 1.4mm	29.8	61.9
1.4mm < t < 1.6mm	29.9	62.1

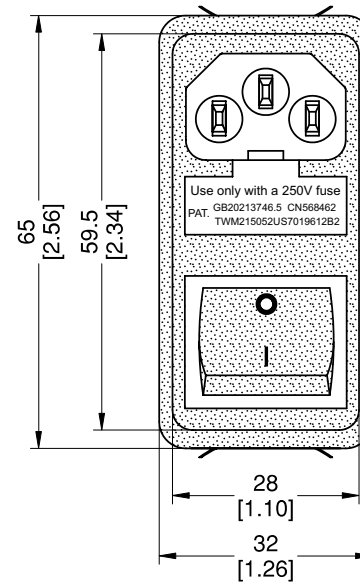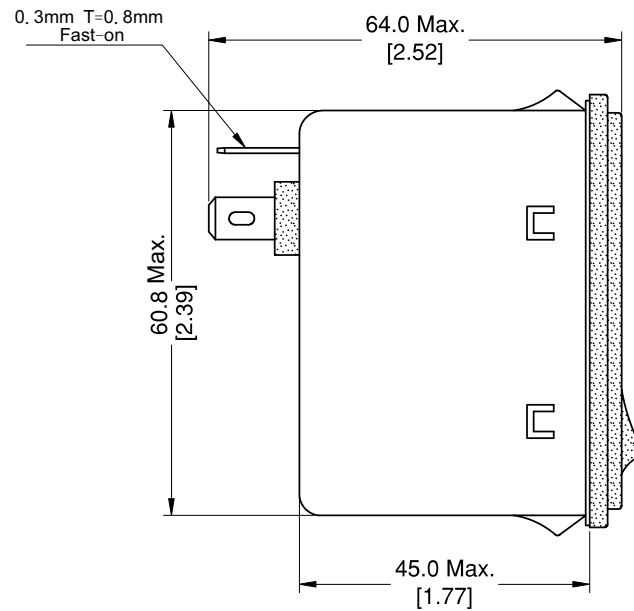

PULL-OUT FORCE FOR
FUSEHOLDER IS 1.3~2.0KGF
(Dual Fuse)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 ~ 10 ±0.3
10 ~ 100 ±0.5
100 ~ 150 ±0.8
150 ~ 250 ±1.0

照片框

ORDER INFORMATION

ACFT-PQ6FSSWPA-03A10-LF

SERIES MALE 6.4mmTAB FUSE SWITCH PANEL FRONT 03 WAY 10 AMP LEADFREE

DESCRIPTION:

SPECIFICATION

2. CHARACTERISTICS:

(1)VOLTAGE RATING.....115/250VAC

(2)CURRENT RATING:

A.AT 115VAC.....10A RMS Max.

B.AT 250VAC.....10A RMS Max.

(3)OPERATING FREQUENCY: 50/60Hz

(4)LEAKAGE CURRENT: EACH LINE TO GROUND

A. AT 115VAC/60Hz.....2uA Max.

B. AT 250VAC/50Hz.....5uA Max.

(5)HIPOT RATING (FOR ONE MINUTE)


A. LINE TO GROUND.....2250 VDC

B. LINE TO LINE.....500 VDC

(6)IR:100M ohm AT 500VDC ANY INPUT OR OUTPUT TO GROUND

(7)TEMPERATURE RANGE: -25°C~+85°C

3. ELECTRICAL SCHEMATIC

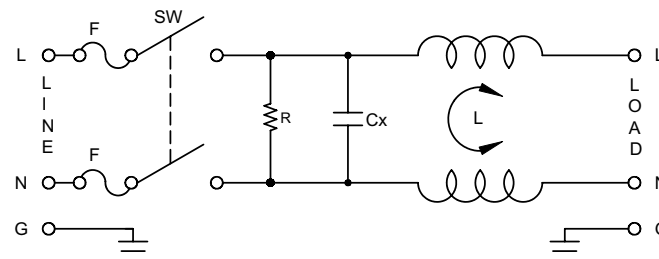

L:0.2mHx2^{+50%}_{-30%} @100KHz 0.25V

Cx:0.1uF ±10% @1KHz 1V

R:1MΩ ±10% @1KHz 1V

4. MINIMUM INSERTION LOSS IN dB:(AT 50 OHM SYSTEM)

MHz	0.15	0.5	1	5	10	30
COM.MODE	9	13	19	19	17	13
DIFF.MODE	8	18	24	51	36	26

* ABOVE TABLES ARE REFERENCE ONLY .

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 ~ 10 ±0.3
10 ~ 100 ±0.5
100 ~ 150 ±0.8
150 ~ 250 ±1.0

照片框

ORDER INFORMATION

ACFT-PQ6FSSWPA-03A10-LF

SERIES MALE 6.4mmTAB FUSE SWITCH 03 WAY PANEL FRONT 10 AMP LEADFREE

DESCRIPTION: