

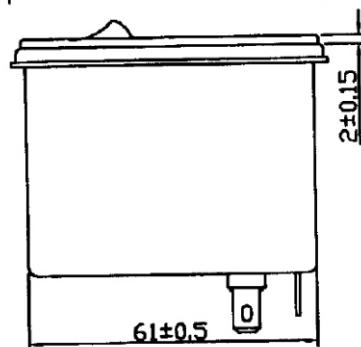
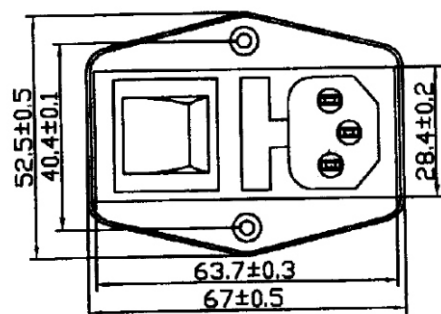



1. PHYSICAL DIMENSIONS:(mm)

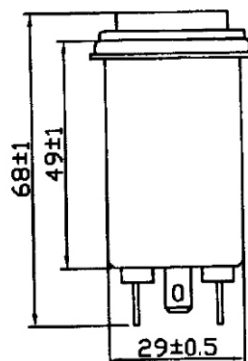

SUGGESTED CUTOUT
MOUNTING DIMENSIONS
OF SOCKET

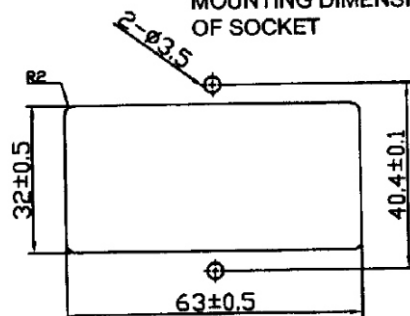

2.SCHEMATIC:

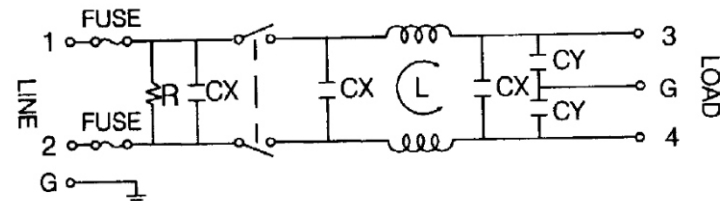

CX : 0.22uF
CY : 2200pF
L : 2 x 0.8mH
R : 1MΩ

3.ELECTRICAL CHARACTERISTICS:

3-1.RATED VOLTAGE	125/250VAC
3-2.RATED CURRENT	6 A
3-3.OPERATING FREQUENCY.....	50/60Hz
3-4.LEAK CURRENT:EACHLINE TO GROUND 250VAC 50Hz	0.6mA MAX
3-5.HIPOT RATING:(FOR ONE MINUTE)	
LINE TO LINE	1450VDC
LINE TO GROUND	2250VDC
3-6.INSULATION RESISTANCE	250VDC/100MOHM MIN
3-7.DIRECT CURRENT RESISTANCE	0.2OHM MAX
3-8.OPERATING TEMPERATURE	-25 TO +85°C

ACFT-PQ6FSSWPE-03-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO.ACFT-PQ6FSSWPE-03

DWG NO. ACFT-PQ6FSSWPE-03

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司