


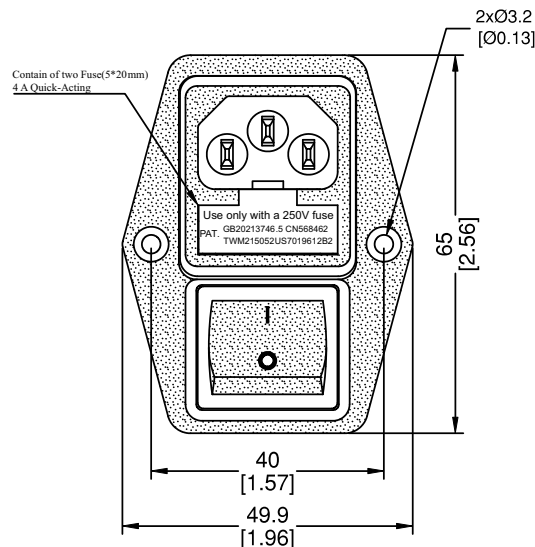


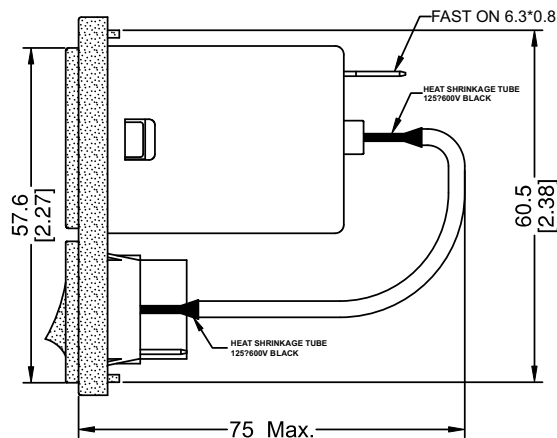


PULL-OUT FORCE FOR
FUSEHOLDER IS 1.3~2.0KGF
(Dual Fuse)

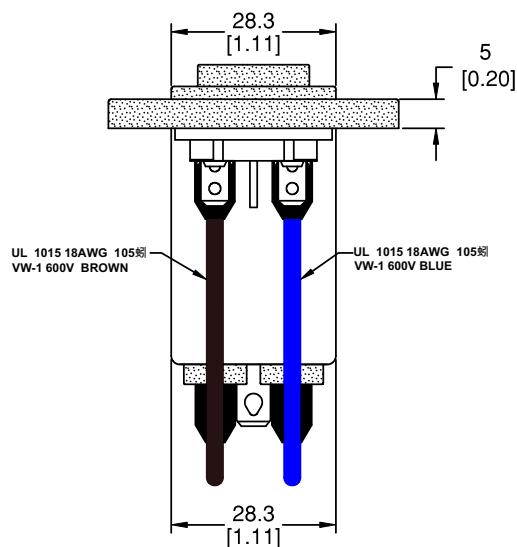

SUGGESTED PANEL CUTOUT
(MOUNTING FROM FRONT)

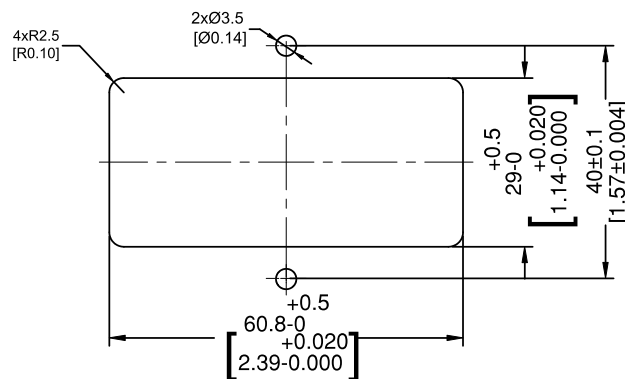

SUGGESTED PANEL CUTOUT
(MOUNTING FROM REAR)

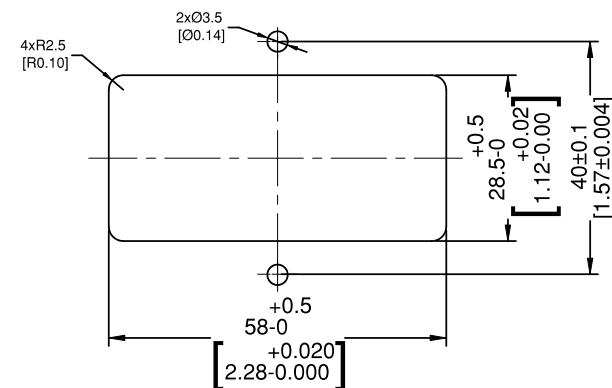

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

ACFT-PQ6FSSWPE-03A06-LF

SERIES
MALE
6.4mmTAB
FUSE
03 WAY
EAR
PANEL
SWITCH
6 AMP
LEADFREE

DESCRIPTION: BEZEL+Switch

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 ~ 10 ±0.3
10 ~ 100 ±0.5
100 ~ 150 ±0.8
150 ~ 250 ±1.0

SPECIFICATION

1. CHARACTERISTICS:

(1)VOLTAGE RATING115/250VAC

(2)CURRENT RATING:

A.AT 115VAC.....6A RMS Max.

B.AT 250VAC.....6A RMS Max.

(3)OPERATING FREQUENCY: 50/60Hz

(4)LEAKAGE CURRENT: EACH LINE TO GROUND

A. AT 115VAC/60Hz.....0.3mA Max.

B. AT 250VAC/50Hz.....0.6mA Max.

(5)HIPOT RATING (FOR ONE MINUTE)


A. LINE TO GROUND.....2250 VDC

B. LINE TO LINE.500 VDC

(6)IR:100M ohm AT 500VDC ANY
INPUT OR OUTPUT TO GROUND

(7)TEMPERATURE RANGE: -25°C~+85°C

2. ELECTRICAL SCHEMATIC

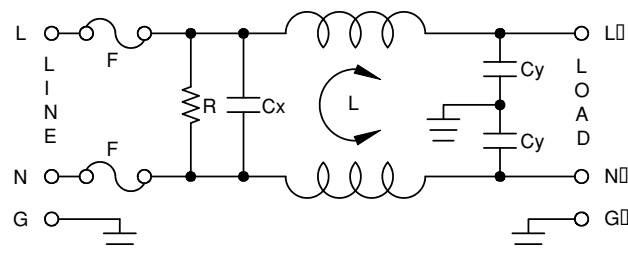

L: 1.1mHx2 $+50\%$ -30% @10KHz 0.25V

Cx: 0.22uF(X2) $\pm 0\%$ @1KHz 1V

Cy: 3300pF(Y2)x2 20% @1KHz 1V

R: 1M Ω $\pm 0\%$ @1KHz 1V

3. MINIMUM INSERTION LOSS IN dB:(AT 50 OHM SYSTEM)

MHz	0.15	0.5	1	5	10	30
COM.MODE	20	28	34	51	53	41
DIFF.MODE	15	26	33	50	58	21

* ABOVE TABLES ARE REFERENCE ONLY .

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 ~ 10 ± 0.3
10 ~ 100 ± 0.5
100 ~ 150 ± 0.8
150 ~ 250 ± 1.0

照片框

ORDER INFORMATION

ACFT-PQ6FSSWPE-03A06-LF

SERIES MALE 6.4mm TAB FUSE SWITCH EAR PANEL 03 WAY 6 AMP LEADFREE

DESCRIPTION: