


1. PHYSICAL DIMENSIONS:

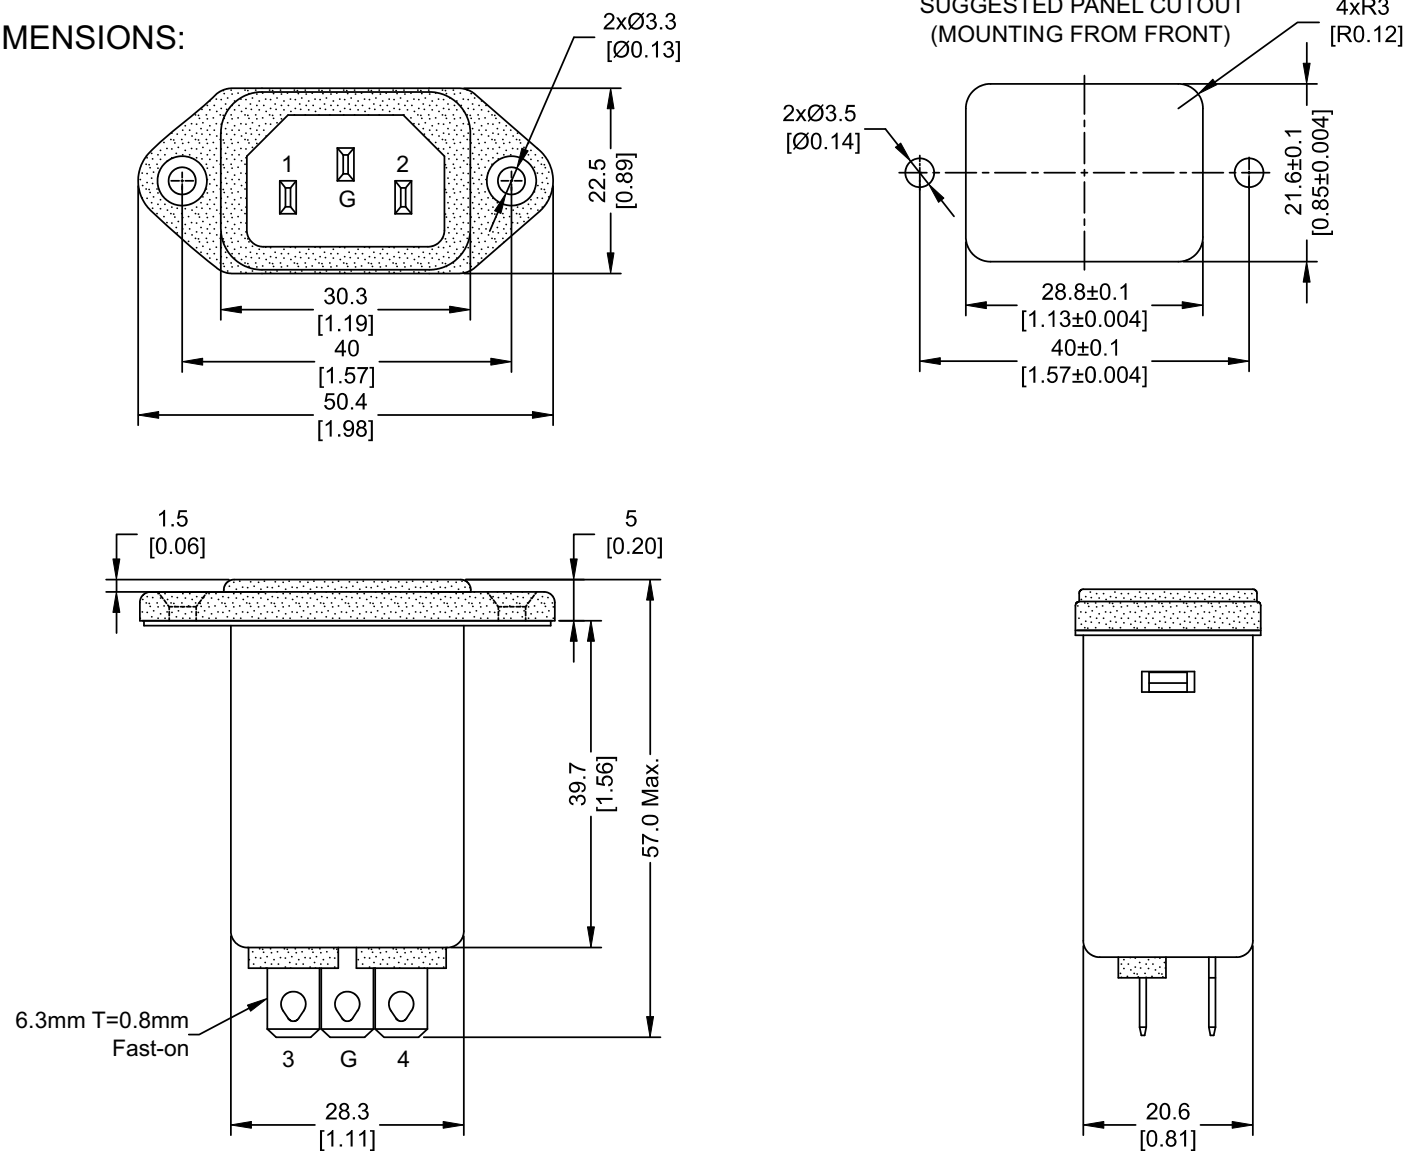

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

ACFT-PQ6PE-03A06-LF
 SERIES MALE 03 WAY PANEL QUICK TAB 6.3mm
 LEADFREE 6 AMP

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 ~ 10 ±0.3
 10 ~ 100 ±0.5
 100 ~ 150 ±0.8
 150 ~ 250 ±1.0

SPECIFICATION

2. PART NUMBER:

3. CHARACTERISTICS:

(1)VOLTAGE RATING.....115/250VAC

(2)CURRENT RATING:

A.AT 115VAC.....6A RMS Max.

B.AT 250VAC.....6A RMS Max.

(3)OPERATING FREQUENCY: 50/60Hz

(4)LEAKAGE CURRENT: EACH LINE TO GROUND

A. AT 115VAC/60Hz.....0.25mA Max.

B. AT 250VAC/50Hz.....0.45mA Max.

(5)HIPOT RATING (FOR ONE MINUTE)


A. LINE TO GROUND.....2250 VDC

B. LINE TO LINE.....1450 VDC

(6)IR:100M ohm AT 500VDC ANY INPUT OR OUTPUT TO GROUND

(7)TEMPERATURE RANGE: -25°C - 85°C

4. ELECTRICAL SCHEMATIC

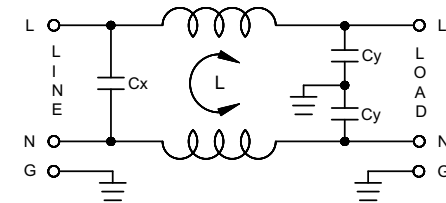

L: $0.8\text{mH} \times 2_{-30}^{+50}\%$ @100KHz 0.25V

Cx: $0.1\mu\text{F}(\text{X}2) \pm 10\%$ @1KHz 1V

Cy: $2200\text{pF}(\text{Y}2) \times 2 \pm 20\%$ @1KHz 1V

5. MINIMUM INSERTION LOSS IN dB:(AT 50 OHM SYSTEM)

MHz	0.15	0.5	1	5	10	30
COM.MODE	18	24	28	44	50	47
DIFF.MODE	8	18	26	43	51	31

* ABOVE TABLES ARE REFERENCE ONLY .

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 ~ 10 ±0.3
10 ~ 100 ±0.5
100 ~ 150 ±0.8
150 ~ 250 ±1.0

照片框

ORDER INFORMATION

ACFT-PQ6PE-03A06-LF

SERIES MALE
03 WAY
PANEL
QUICK TAB 6.3mm
LEADFREE
6 AMP

DESCRIPTION: