

規格 Specifications

額定

1. Rated : current: 1A, 3A, 6A, 10A.
voltage: 115/250 VAC.

漏電流

3. Leakage current : 0.5mA Max. 250VAC 50HZ.

耐電壓


4. Hipot rating : Line to Ground: 2250VDC.
Line to line: 1450VDC.

插座


5. Inlet socket : compatible with IEC 320.

認可安規

6. Safety : 

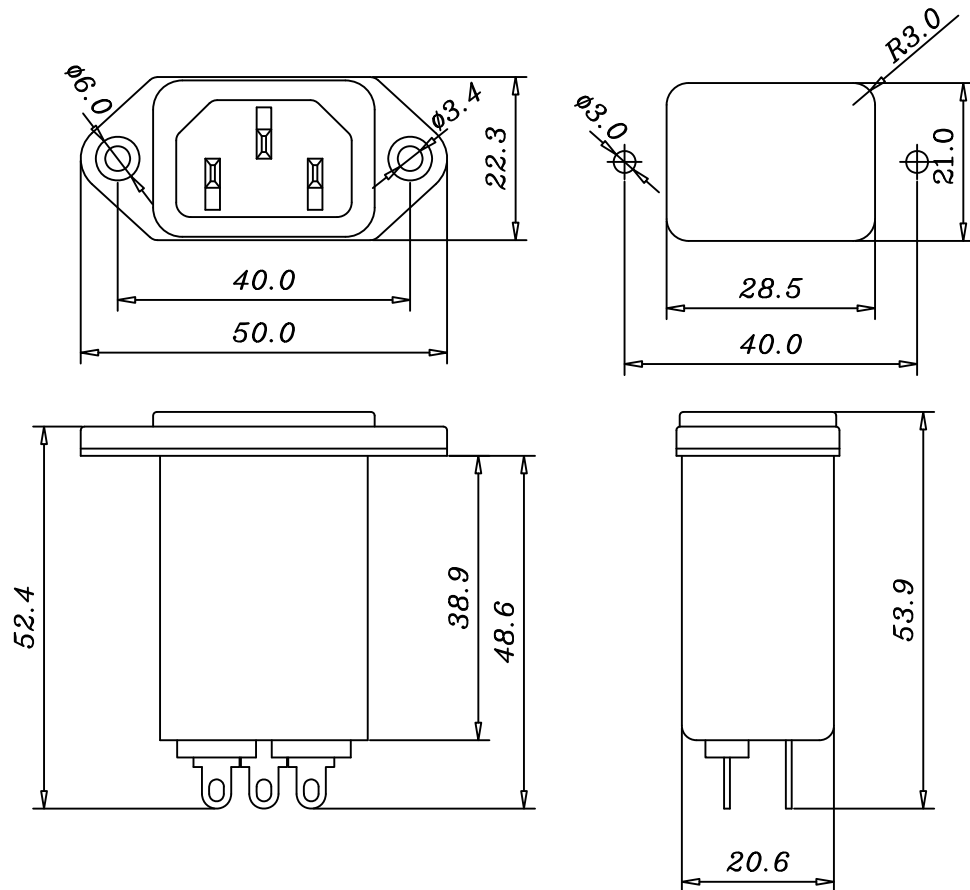

Electrical schematic

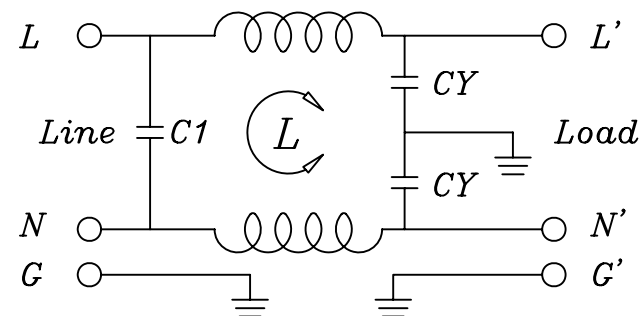

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

ACFT-PS4PE-03Axx-LF

SERIES

MALE

4.8mm SOLDER

PANEL

LEADFREE

A01:1AMP
A03:3AMP
A06:6AMP
A10:10AMP

03 WAY

DESCRIPTION: