
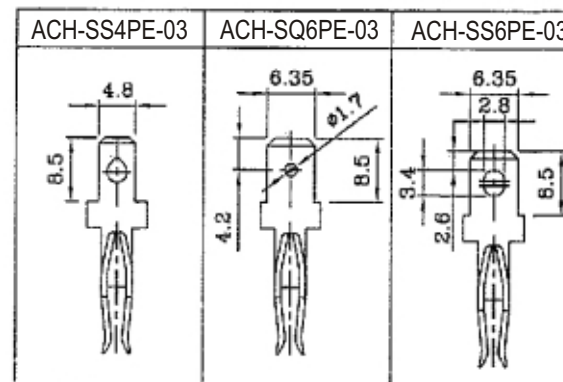
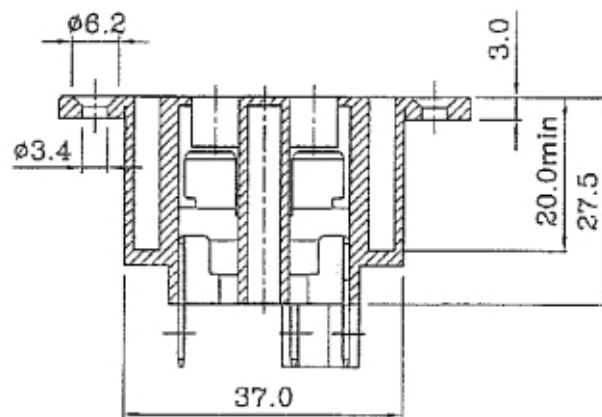
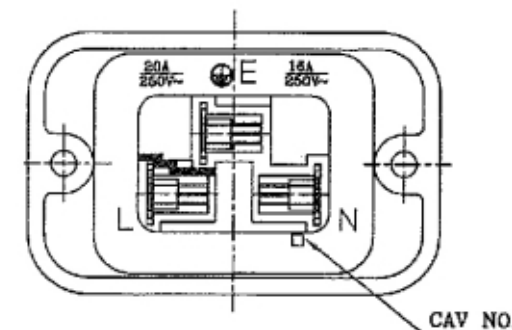
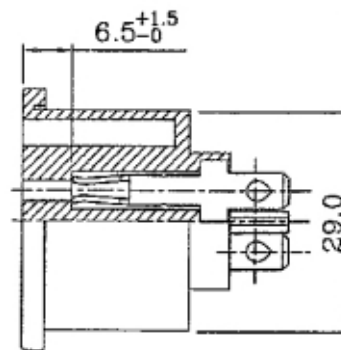


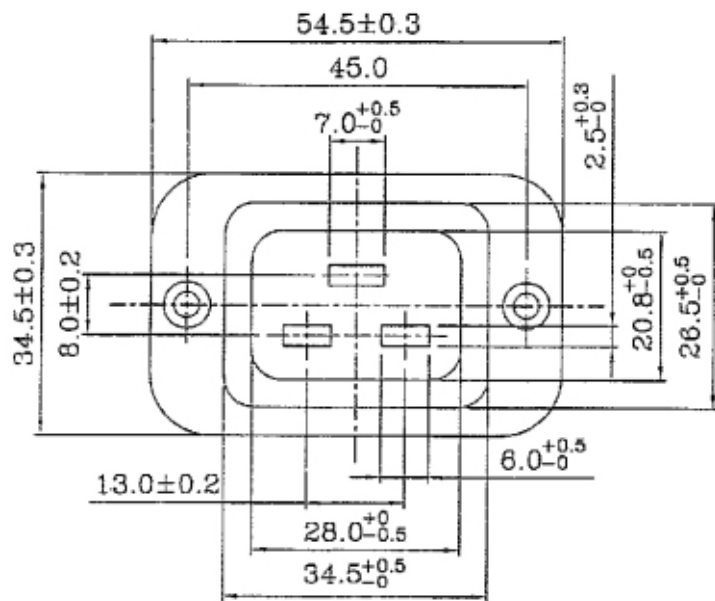

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating:AC 20A 250V	
Mark	Safety Regulation
cULus	cULus
Rating:AC 16A 250V	
Mark	Safety Regulation
	VDE
	CCC

ACH-SxxPE-03-LF
LEADFREE

S4:SOLDER/TML/4.8mm
Q6:QUICK/TML/6.3mm
S6:SOLDER/TML/6.3mm
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. ACH-SxxPE-03

DWG NO. ACH-SxxPE-03

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE