






Rating: 2.5A 250V AC
Approvals: UL/CSA/VDE/NEMKO/CCC

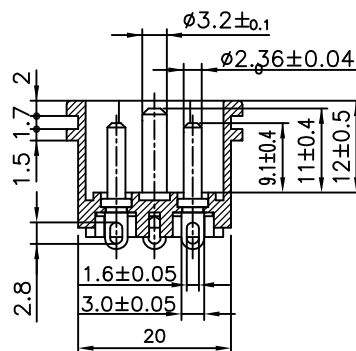

4	Soldering PIN Brass Strip t=0.5mm Tin-Plated	3
3	Solid Contact PIN Brass Strip d=Ø2.36mm Ni-Plated	2
2	Solid Contact PIN Brass Strip d=Ø3.2mm Ni-Plated	1
1	Body Insulator PC Black Color	1



Panel Cutout

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

ACR-PRPS3-03-LF
SERIES T T T LEADFREE
03 WAY
SOLDER TAB 3.0mm
POST
90°
MALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

DESCRIPTION: