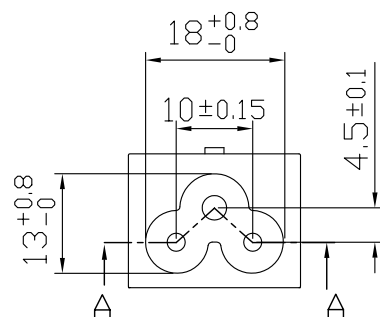




Current Rating: 2.5A/10A(UL) / 2.5A(VDE)

Voltage Rating: 250V(UL) / 250V(VDE)


Soldering: Brass, Matte-Tin Plated

Contact: Brass, Nickel Plated

Body Insulator: PA66

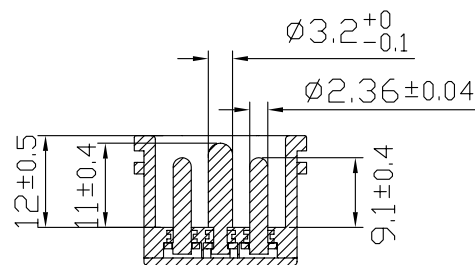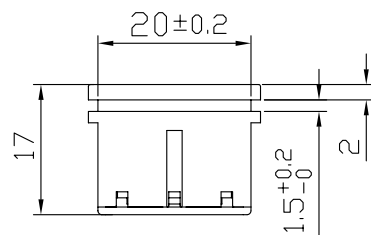

SECTION A-A

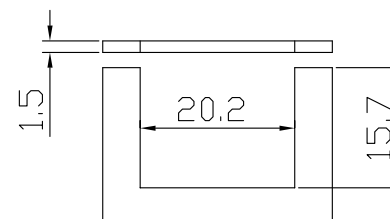

PANEL CUT-OUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ACR-PSPC-03-LF
SERIES T T T LEADFREE
03 WAY
C TYPE
PANEL
SOLDER
MALE

DESCRIPTION: