

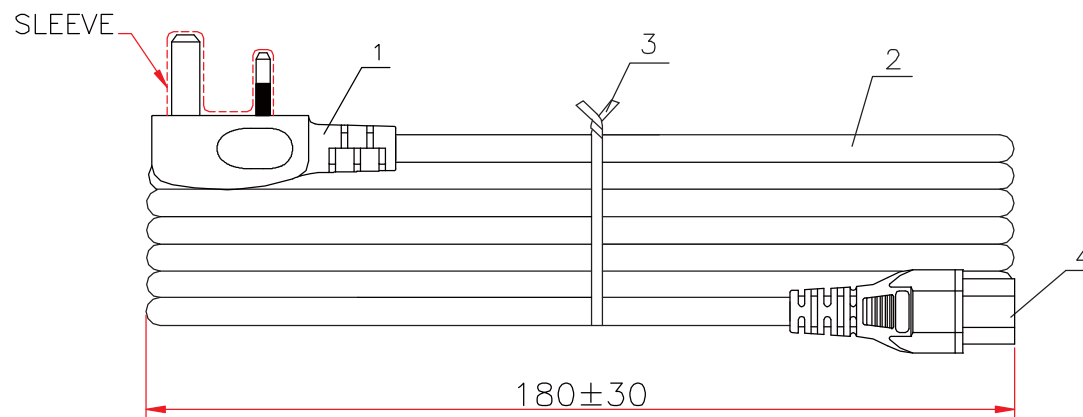


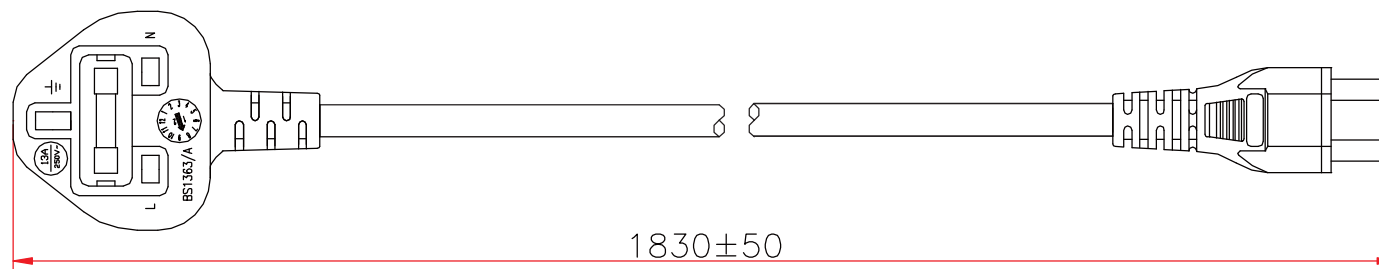

CORD SECTION:



1. PVC MOLDED PLUG: (FUSE=13A, BLACK)
2. PVC FLEXIBLE CORD: H05VV-F 3G0.75mm² (BLACK)
3. PET TIE (BLACK)
4. PVC MOLDED CONNECTOR: (BLACK)

NOTE: ALL MATERIALS ARE RoHS COMPLIANCE.

CORD MARKING:

Cabo H05VV-F 3G0.75mm² <VDE> KEMA-KEUR IEMMEQU +++++ <VDE>
 CEBEC (S) (N) (D) (F) SABS SANS 60227-5 60227 IEC 53 300/500V CE Cn -LF-
 ROLL NO.: 1,2,3...
 CHINA FACTORY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

ACRBSI-3S3R18-A6F-LF

SERIES

LEADFREE


1830mm

FEMALE TO MALE





18 AWG

03 WAY 180° TO 03 WAY 90°

DESCRIPTION: POWER SUPPLY CORD

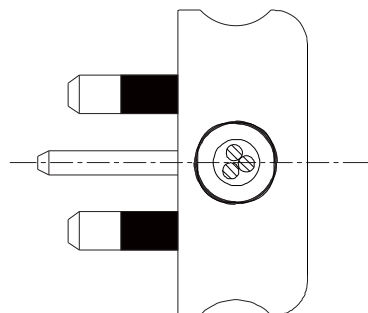

A VIEW

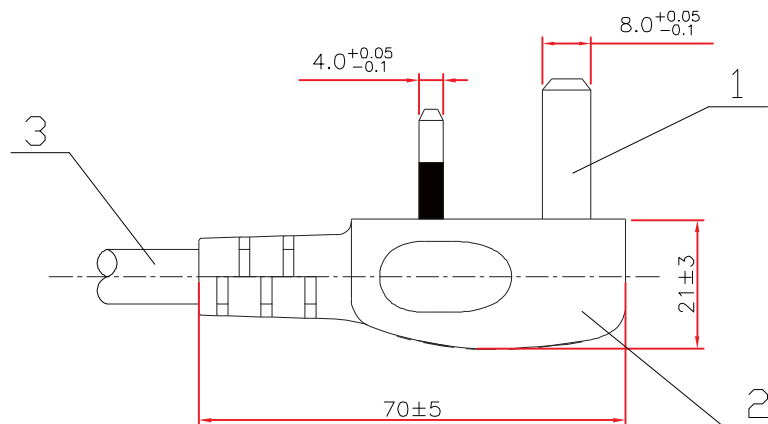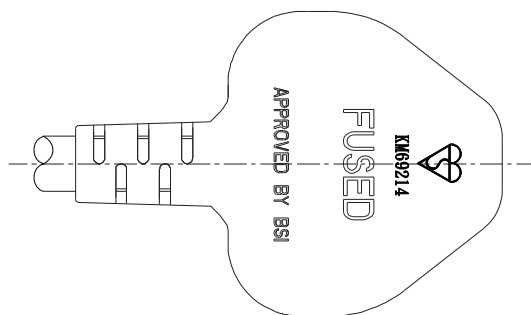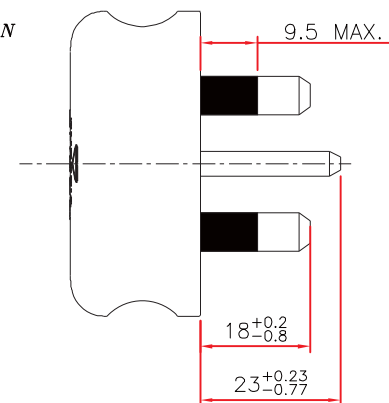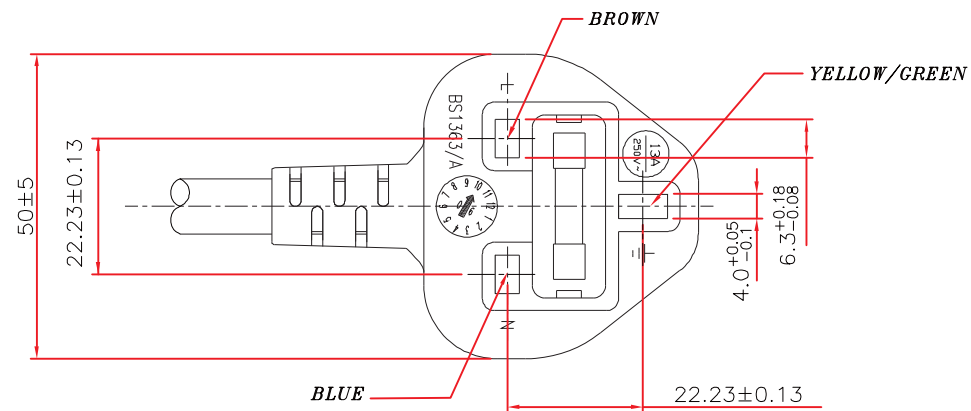

1. PIN
2. PVC MOLDED PLUG
3. FLEXIBLE CORD

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

ACRBSI-3S3R18-A6F-LF

SERIES

LEADFREE


1830mm

FEMALE TO MALE


18 AWG

03 WAY 180° TO 03 WAY 90°


DESCRIPTION:

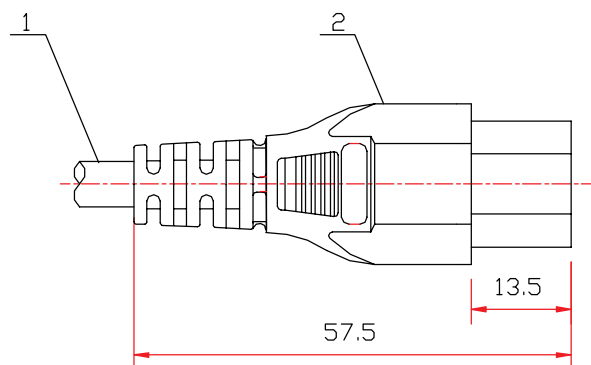

A

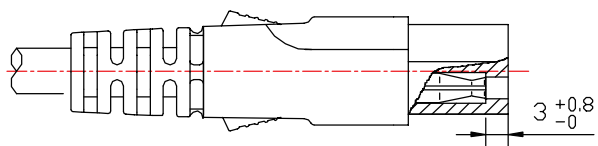

B

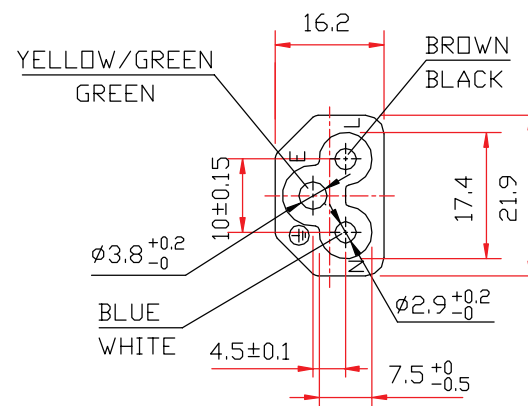

1. PVC FLEXIBLE CORD.
2. PVC CONNECTOR BODY.

TOLERANCE:
 $>20:\pm 2.0$
 $\leq 20:\pm 1.0$
 $\leq 10:\pm 0.5$
 $\leq 1.0:\pm 0.3$

SIDE A:
 2.5A 250V~

SIDE B:



BS EN60320
 Licence No. KM70768

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

ORDER INFORMATION

ACRBSI-3S3R18-A6F-LF

SERIES

FEADFREE

1830mm

FEMALE TO MALE

18 AWG

03 WAY 180° TO 03 WAY 90°

DESCRIPTION: