

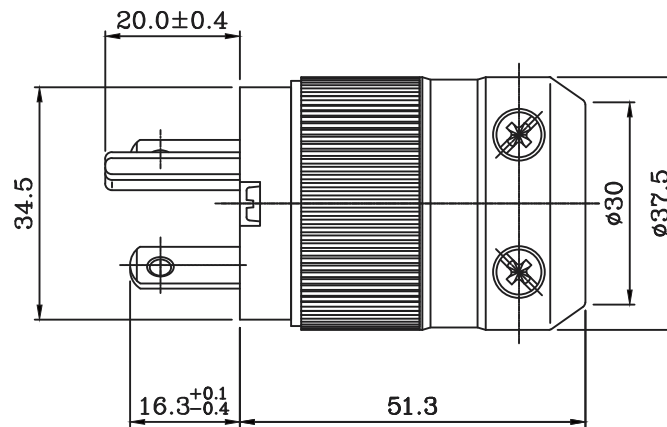
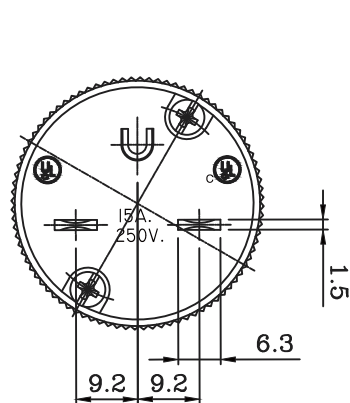


1. appearance drawing shown as below :




2. identification of wiring terminals:



3. wire connector method:

- Use copper wire only " Cu wire only "
- Strip length for intended conductors: unit : mm



4. The intended flexible cord:

- Cord Type -Type SJT
- 15A Cord Size -No 14AWG
20A Cord Size -No 12AWG
- Total number of conductors-3 conductors
- Overall cord
15A diameter-3.4mm
20A diameter-3.7mm

Material NYLON

NEMA 6-15 Straight Plug
Rating: 15Amp 250V AC
2 Pole . 3 Wire Grounding

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

ACT-PA-03-LF
SERIES T T LEADFREE
03 WAY
ASSEMBLY
MALE

DESCRIPTION: