
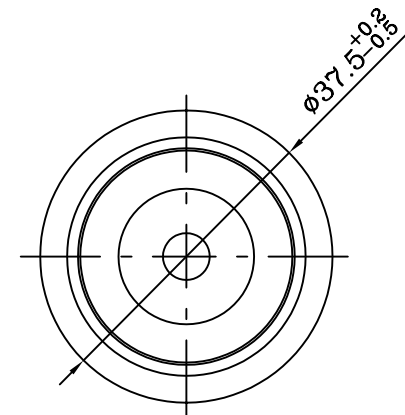
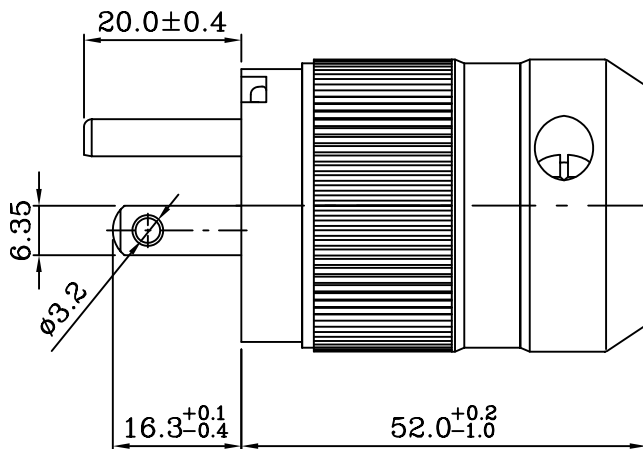


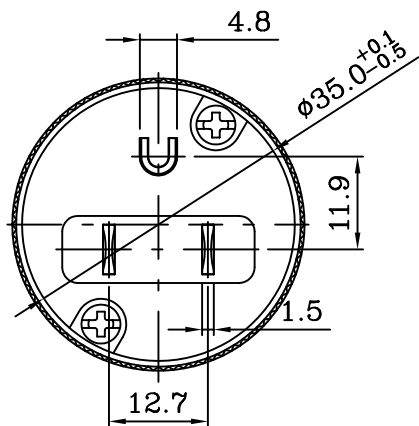

ACU-PAxx-03-LF
LEADFREE

TR:TRANSPARENT
RD:RED COLOR
BL:BLUE COLOR

RoHS Compliant

Description	Notes
No plating	
Extrenal plating:Ni	
Extrenal plating:Au	

Notes:

SPECIFICATION:

- Insulation Resistance: Over 100M Ω at 500V DC.
- Dielectric strength: 2000V AC 1 Minute.
- Body Material: Thermoplastic 94V-2~V-0.
- The intended flexible cord:
 - Cord Type - Type SJT
 - Cord Size - NO.12 AWG
 - Total Number of conductors-3 conductors
 - Overall cord diameter -10.6mm²
- Rating:AC 15A 125V

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. ACU-PAxx-03

DWG NO. ACU-PAxx-03

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司