

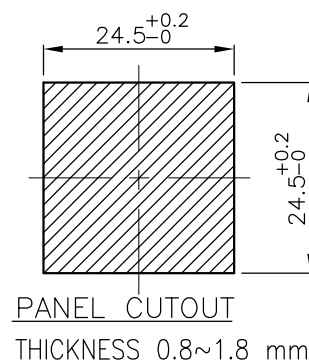

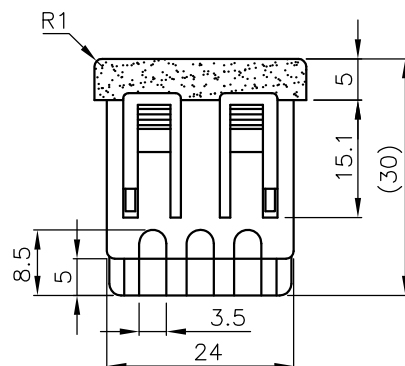




NOTE: THIS ILLUSTRATION PERTAINS TO SOLID WIRE APPLICATIONS ONLY

Rating : 10A 125V AC
Approvals : UL/CSA

SINGLE SOCKET

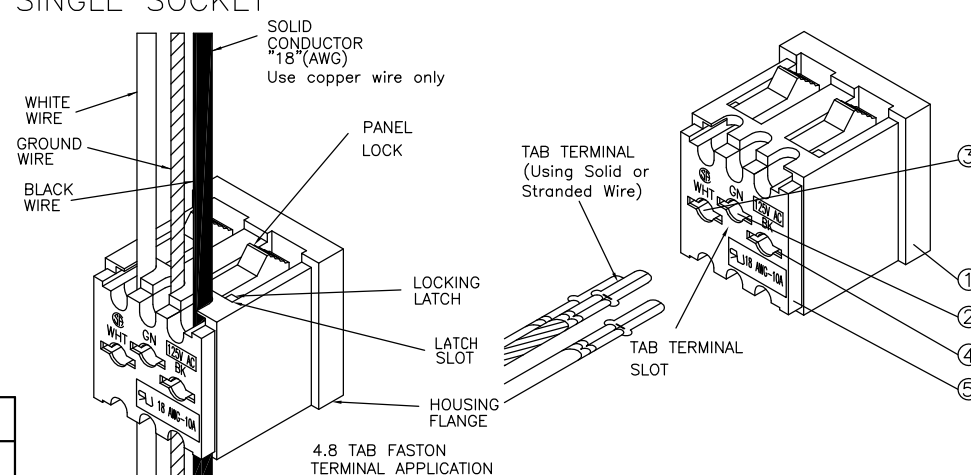

5	Cover back of the Body, NYLON Black Color	1
4	Contact PIN Brass Strip t=0.4mm Cu-Plated	1
3	Contact PIN Brass Strip t=0.4mm Ni-Plated	1
2	Contact PIN Brass Strip t=0.4mm Cu-Plated	1
1	Body Insulator NYLON	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

ACU-SI18PA-03-LF

SERIES | LEADFREE
03 WAY
PANEL FRONT
18 AWG
SOCKET IDC

DESCRIPTION: