



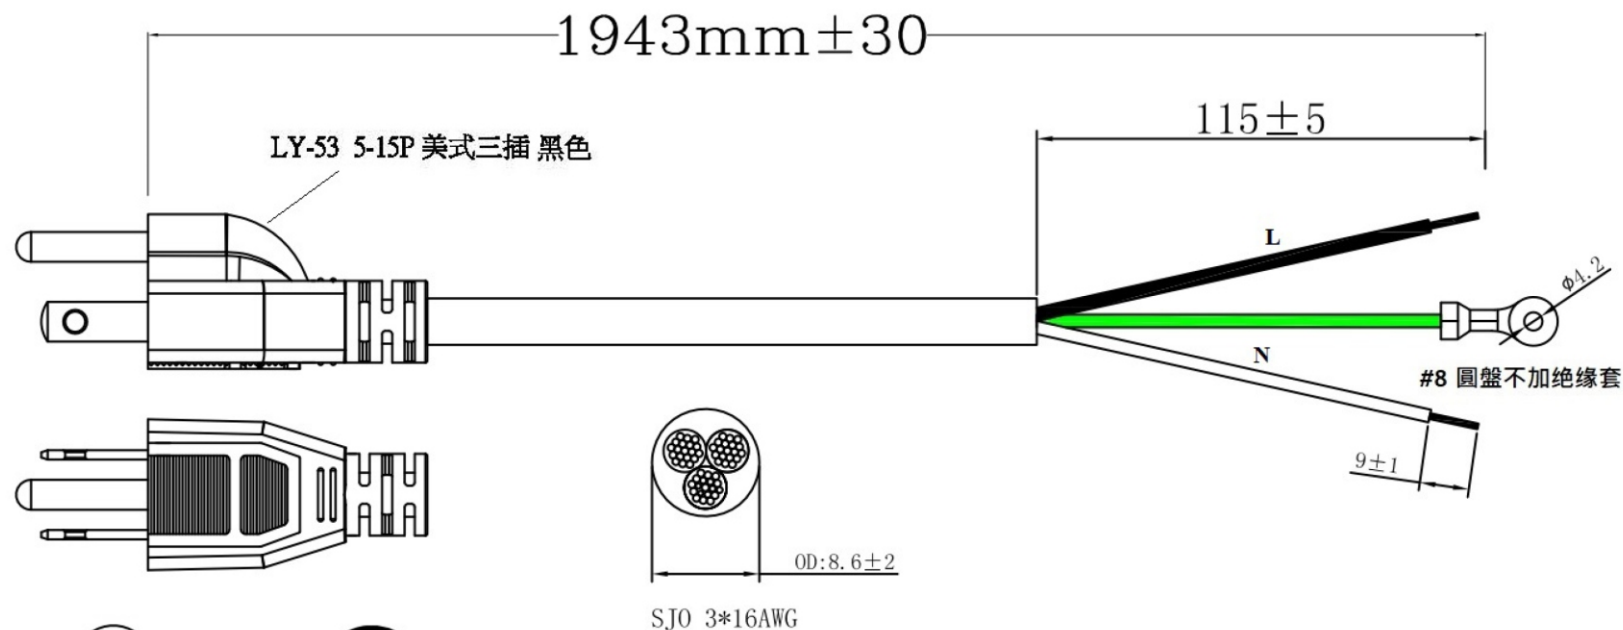

技術要求:
Technical requirements:

1. 功率範圍：耐壓125V 電流15A 耐溫105度
Power Range: 125V 15A 105°C
2. 插頭表面無流痕、氣泡、縮水、雜物 混色、髒汙等。
The plug surface is free of flow marks, bubbles, shrinkage, mixed color of sundries, dirt, etc.

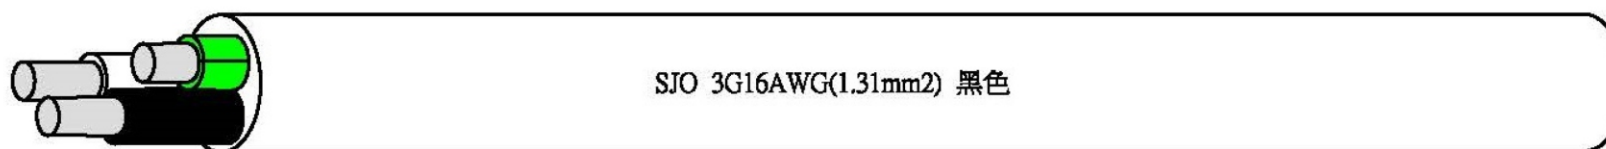

SJO 3G16AWG(1.31mm²) 黑色

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACURT-0342X16-E76N5-LF

SERIES

LEADFREE

1943mm

MALE TO FEMALE

16 AWG

03 WAY TO 4.2Ø NON PVC

DESCRIPTION: 美式三插 5-15P 電源線 L:1.943M BLACK