


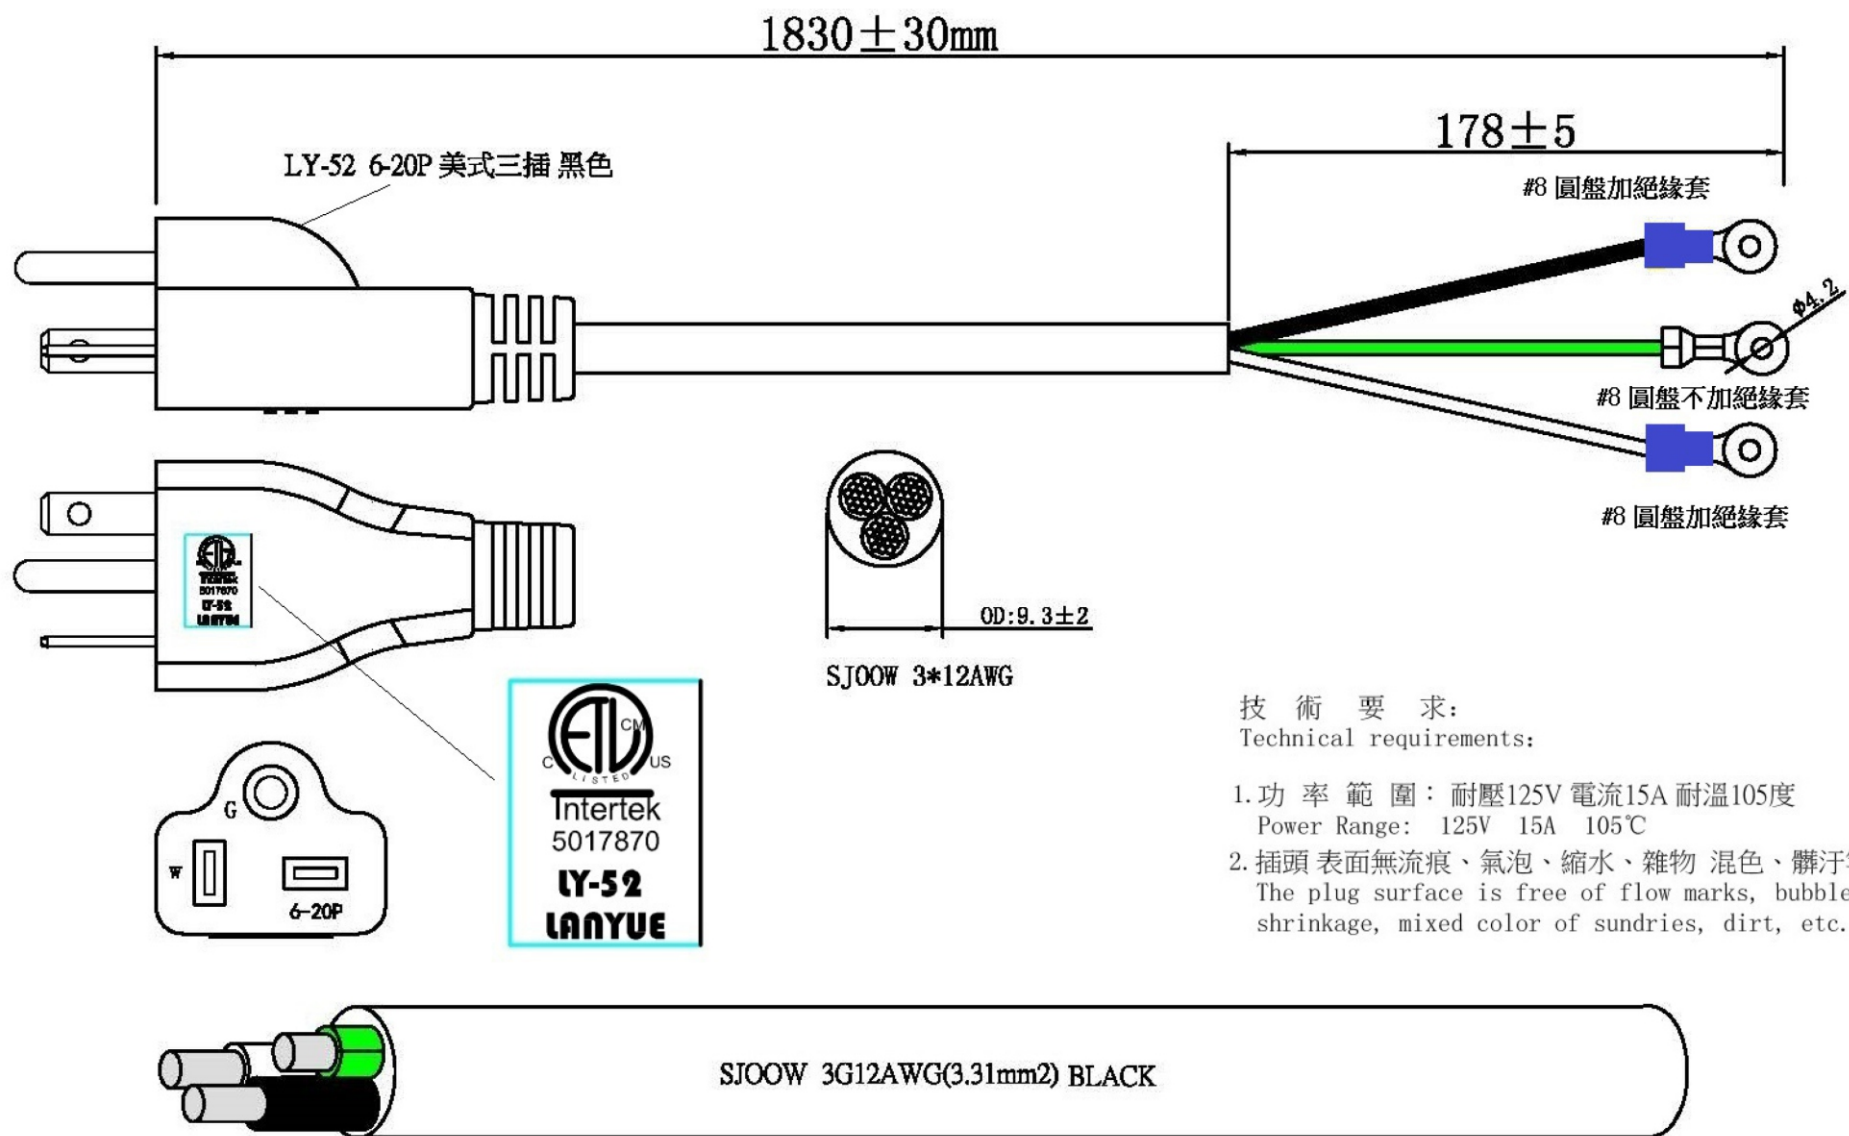

技術要求:

Technical requirements:

- 功率範圍：耐壓125V 電流15A 耐溫105度
Power Range: 125V 15A 105°C
- 插頭表面無流痕、氣泡、縮水、雜物 混色、髒汙等。
The plug surface is free of flow marks, bubbles, shrinkage, mixed color of sundries, dirt, etc.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACVRT3-0343V42X12-E6F-LF

SERIES

LEADFREE

1830mm

MALE TO FEMALE

12 AWG

03 WAY TO 4.3Ø+PVC TO 4.2Ø NON PVC

DESCRIPTION: 美式三插 5-20P 電源線 L:1.83M BLACK