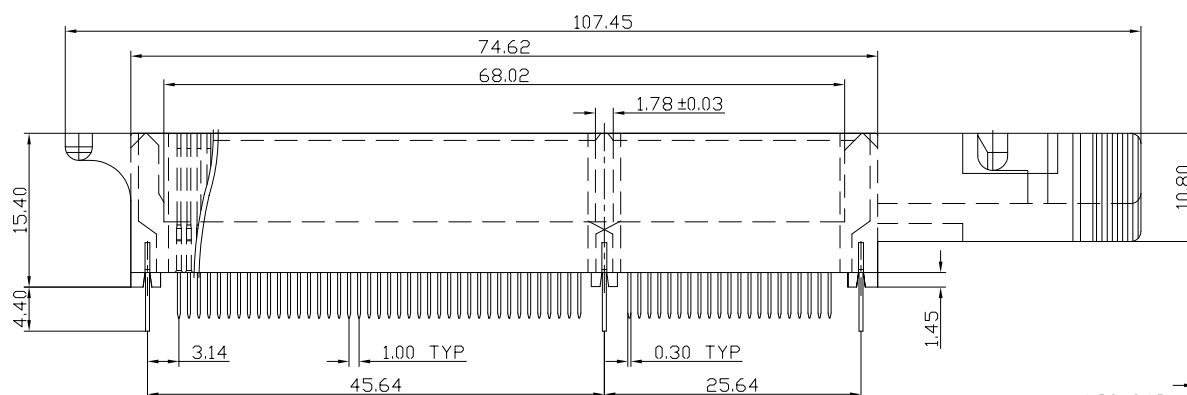
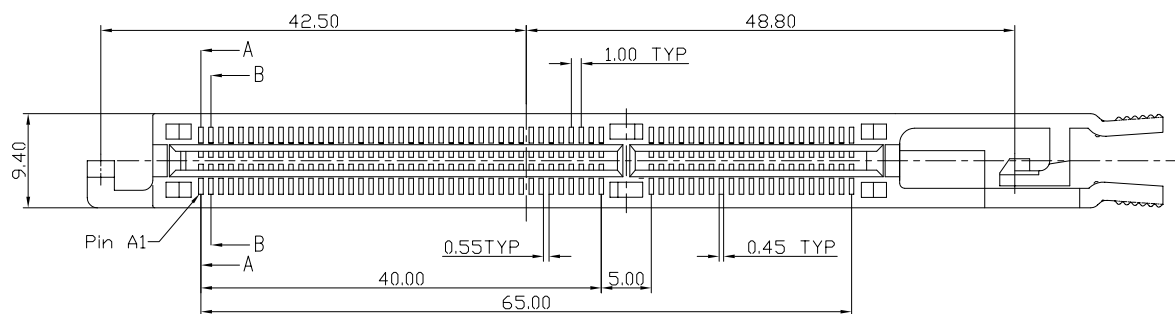


Material:

Body: High temperature thermoplastic, UL 94V-0

Contacts: Copper alloy

Contact Plating: Gold plating over nickel on contact area tin/lead plating on terminal

mechanical:

Insertion Force: 100 Grams max. (Per mated pair)

Withdrawal Force: 30 Grams min. (Per mated pair)

Contact Retention: 350 Grams min

Electrical Specification:

Contact Resistance: 10 Milliohms max.initial ,

2 Milliohms Max. Increase Through Testing.

Current Rating: 1 Ampere.

Insulation Resistance: 1000 Megohms min.

Dielectric Withstanding Voltage: 500V AC. 1 minute.

Capacitance: 2 pF max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

照片框

ORDER INFORMATION

AGP-DZL3-124-LF
SERIES T T LEADFREE
LOCK 124 WAY
CLIP
DIP 180°

DESCRIPTION: AIMM 124 Pins Connectors (4X) 鐵腳