
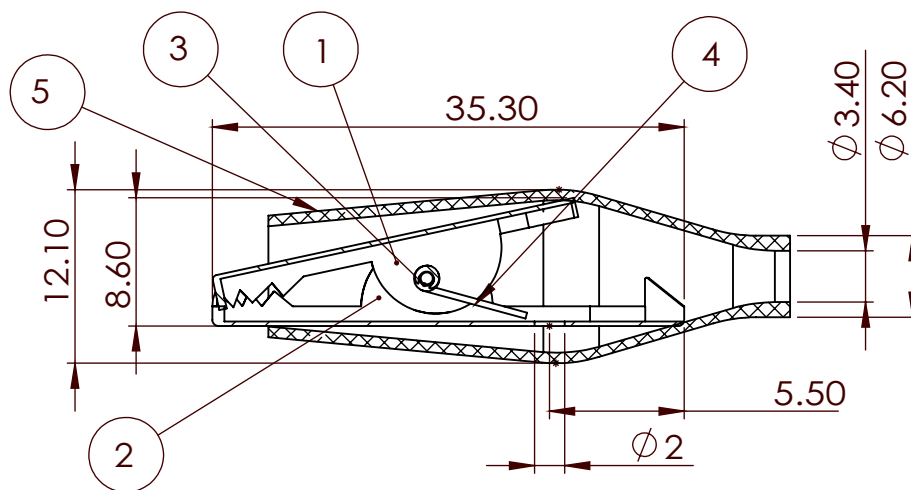


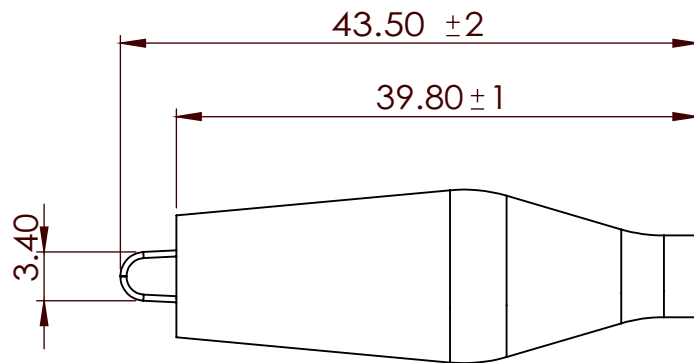

剖面圖 D-D

比例 2 : 1

SPECIFICATION:

耐電壓Withstand voltage: AC 500V 60Hz for 1 minute

絕緣阻抗Insulation resistance : 100MΩ (min) at 500V DC

接觸阻抗Contact resistance : 50mΩ max

定格Rating: 3A 125VAC

STEEL(鋼鐵)

COPPER(銅)

STEEL(鋼鐵)T=0.3MM

STEEL(鋼鐵)T=0.3MM

FINISHED(外觀)

COLOR:

RED(RD)/BALCK(BK)/BLUE(BL)/GREEN(GR)/YELLOW(YL)/WHITE(WH)

NO	PART NAME(品名)		MATERIAL(材質)	Q'TY
5	COVER(塑膠套)	PVC	RD紅/BK黑/BL藍/ GR綠/YL黃/WH白	1
4	SPRING(彈簧)		NICKEL 鍍鎳	1
3	RIVET(铆釘)		NICKEL 鍍鎳	1
2	BUTTON CLIP(下夾)		NICKEL 鍍鎳	1
1	TOP CLIP(上夾)		NICKEL 鍍鎳	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0.5MM-5MM=±0.2MM
5MM-30MM=±0.4MM
30MM-120MM=±0.6MM
120MM-315MM=±1.0MM
315MM-1000MM=±1.6MM
1000MM-2000MM=±2.4MM



ORDER INFORMATION

ALG-Axx-43-LF

SERIES T LEADFREE
43.5mm

ASSEMBLY RD:RED
BK:BLACK
BL:BLUE
GR:GREEN WH:WHITE
YL:YELLOW

DESCRIPTION: Alligator Clips 3A 35MM