
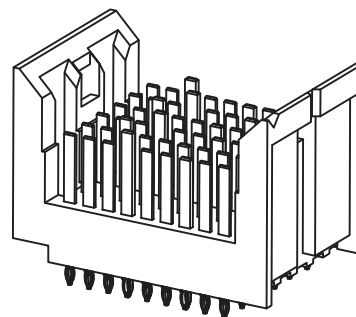


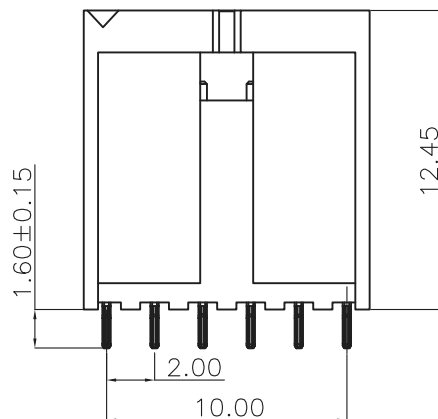

# Material and Plating:

Housing: LCP, UL94V-0, BLACK.

Signal Contact: Phosphor Bronze.

30u" Au+Pd/Ni on Contact Area and 80u" Tin Plated on Press Fit over Nickel 50u" .

# Electrical Characteristics:

Current Rating: 0.5Amps/Contact with all contacts powered



Dielectric Withstanding Voltage: Sig-Sig, Sig-Grd AC 500V For 1minute.  
Grd-Grd AC 200V For 1 minute

Insulator Resistance: 1000MΩ min, Sig-Sig, Sig-Grd at DC 500V,  
Grd-Grd at DC 200V

Contact Resistance: 60mΩ max. at DC 100mA.

Operating Temperature: -55°C~+85°C

\*RoHS Compliant

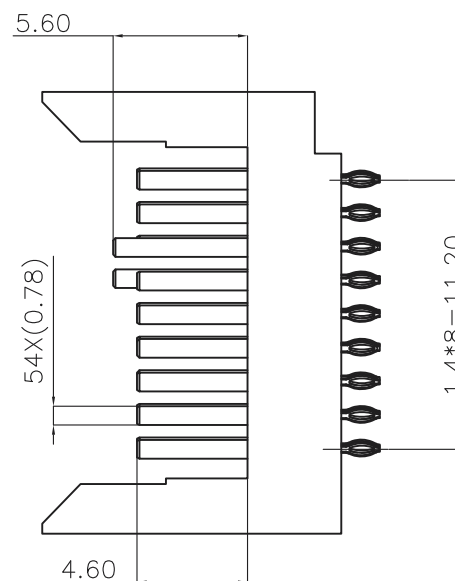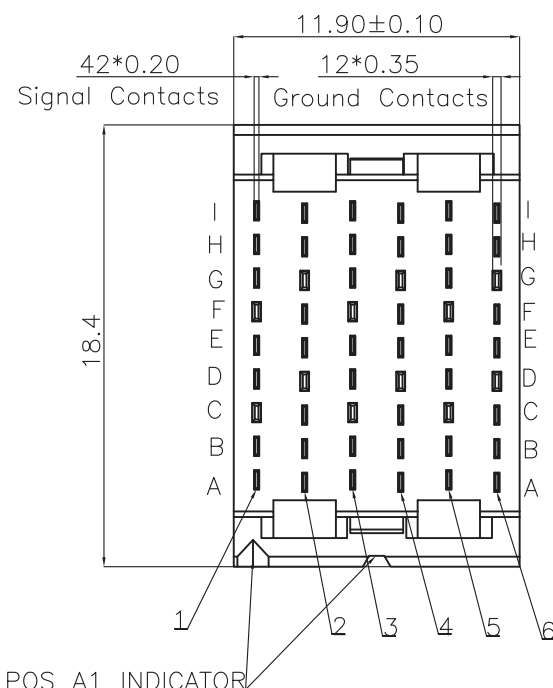

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION




照片框

# ORDER INFORMATION

AMX-PPX-09X06-LF

SERIES  
54 WAY  
NON POST  
PRESS FIT  
MALE

DESCRIPTION: Rapid connectors

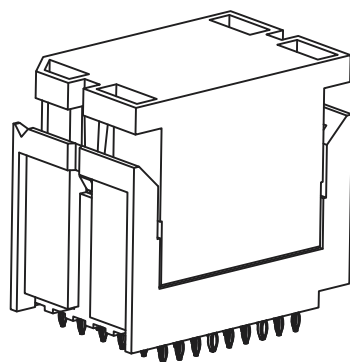

VIEWS SHOWN WITH PROTECTIVE  
COVER INSTALLED

照片框

**RoHS Compliant**

TOLERANCES ARE

DRAWING BY CY

X.  $\pm 0.50$

CHECKED BY GENIUS

.X  $\pm 0.25$

UNIT / mm

SCALE 1 : 1

.XX  $\pm 0.15$

DATE

.XXX  $\pm$

ANG  $\pm$

SIZE A4

PPOJECTION

**ORDER INFORMATION**


AMX-PPX-09X06-LF  
SERIES | | | LEADFREE  
| | | 54 WAY  
| | | NON POST  
| | | PRESS FIT  
| | | MALE

DESCRIPTION: Rapid connectors

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

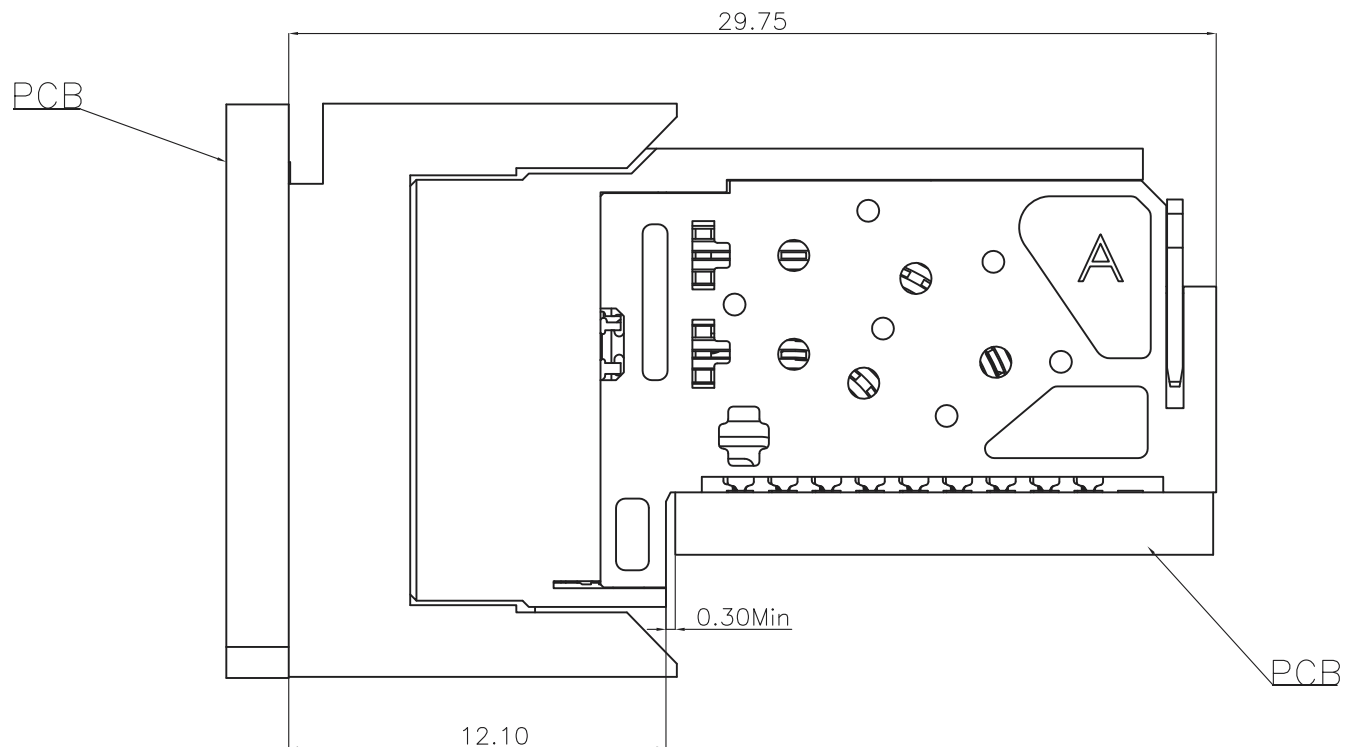

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.  $\pm 0.50$

CHECKED BY GENIUS

.X  $\pm 0.25$

UNIT / mm

SCALE 1 : 1

.XX  $\pm 0.15$

DATE

.XXX  $\pm$

ANG  $\pm$

照片框

**ORDER INFORMATION**

AMX-PPX-09X06-LF  
SERIES | | | LEADFREE  
| | | 54 WAY  
| | | NON POST  
| | | PRESS FIT  
| | | MALE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

DESCRIPTION: Rapid connectors

