



頻率 2.4~2.4835GHz
FREQUENCY

駐波比 ≤ 2.0
V.S.W.R

特性阻抗 50Ω
Impedance

備注
NOTE

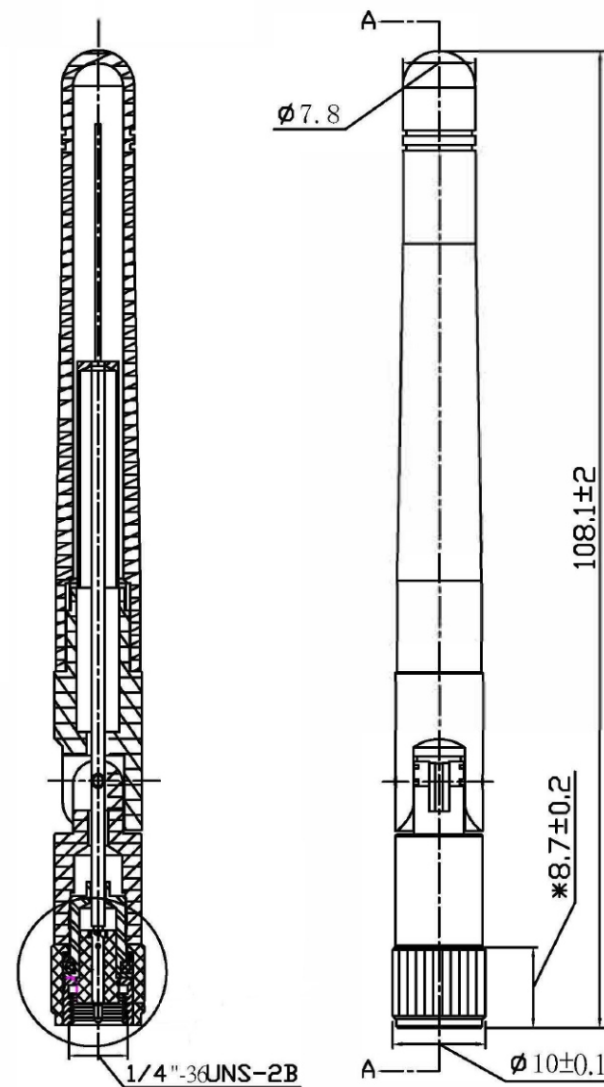

二、檢驗重點：

- 1.天線成 0° 、 45° 、 90° 能固定穩固
- 2.外觀無毛刺，污點及氣紋
- 3.接頭脫落拉拔力6kg，螺牙扭力4kg
不空轉
- 4.接頭扭力在 $0.2 \sim 0.75\text{kgf}$ 之間
- 5.搖晃不得有異音
- 6.部件7折彎測試200次後無脫落
- 7.上下固定座折彎200次後無粉末.
- 8.PIN針組裝後80gf不可轉動.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

ANTSMA-1S1F-M10C8-LF

SERIES

ST

MALE

FOLABLE

LEADFREE
108.1mm

DESCRIPTION: